



Category		Title
NFR:	1.A.3.a, 1.A.5.b *	Aviation
SNAP:	080501	Domestic airport traffic (LTO cycles — ≤ 3000 ft (914.4 m))
	080502	International airport traffic (LTO cycles — ≤ 3000 ft (914.4 m))
	080503	Domestic cruise traffic (> 3000 ft (914.4 m))
	080504	International cruise traffic (> 3000 ft (914.4 m))
	080100	Military aviation
ISIC:		
Version	Guidebook 2016	
Update	July 2017	For details of past updates please refer to the chapter update log available at the online Guidebook website

Lead authors

Morten Winther, Kristin Rypdal

Contributing authors (including to earlier versions of this chapter)

Lene Sørensen, Manfred Kalivoda, Monica Bukovnik, Niels Kilde, Riccardo De Lauretis, Robert Falk, Daniela Romano, Robin Deransy, Laurent Box, Laura Carbo, Nuria Torres Meana, Mark Whiteley.

Contents

1	Overview	3
1.1	Reporting.....	3
2	Description of sources	4
2.1	Aircraft engine emissions.....	4
2.2	Techniques.....	4
2.3	Activities related to flight movements.....	8
2.4	Categories of flights included in aviation inventory activities	10
2.5	Contribution from aviation to the combustion emissions from mobile sources.....	11
2.6	Controls.....	11
2.7	Contribution of air traffic to total emissions	13
3	Methods.....	15
3.1	Choice of method.....	15
3.2	Tier 1 fuel-based methodology	20
3.3	Tier 2 method	22
3.4	Tier 3 flight- and aircraft-type methodology.....	26
3.5	Emission species profiles	32
4	Data quality	34
4.1	Completeness.....	34
4.2	Double counting with other sectors	35
4.3	Verification.....	35
4.4	Uncertainty assessment.....	35
4.5	Inventory quality assurance/quality control (QA/QC).....	36
4.6	Gridding.....	36
4.7	Reporting and documentation	36
4.8	Areas for improvements in current methodology	36
5	Glossary and acronyms	37
6	References	38
7	Point of enquiry.....	41
Annex 1	Projections.....	42
Annex 2	Additional comments on emission factors	46
Annex 3	Black carbon (BC) fractions of particulate matter emissions from aviation	47
Annex 4	EUROCONTROL fuel burn and emissions inventory system	50
Annex 5	Emission calculator accompanying files.....	52
	(see separate files)	

1 Overview

The emissions to be included comprise the civil aviation portion of combustion emissions from mobile sources related to the movement of people and/or freight by air. The activities comprise:

- international airport traffic (LTO cycles ⁽¹⁾ ≤ 3 000 ft (914.4 m))
- international cruise traffic (> 3 000 ft (914.4 m))
- domestic airport traffic (LTO cycles ≤ 3 000 ft (914.4 m))
- domestic cruise traffic (> 3 000 ft (914.4 m)).

The emissions to be included comprise emissions from the civil commercial use of aeroplanes, including scheduled and charter traffic for passengers and freight, air taxiing and general aviation. The distinction between international and domestic air traffic should be determined on the basis of departure and landing locations for each flight stage and not by the nationality of the airline. Fuel used at airports for ground transport should be excluded from these NFR (Nomenclature for Reporting) codes, and reported under 1.A.5.b, Other Mobile. Fuel for stationary combustion at airports should also be excluded and reported under the appropriate stationary combustion category.

The importance of this sector ranges from negligible to quite significant for some pollutants' contribution to the inventories for many countries. Importantly, many emissions from this sector are increasing at a higher rate than from many other sources. The major pollutants generated by these activities are carbon dioxide (CO₂) and nitrogen oxides (NO_x), but with important contributions from carbon monoxide (CO), hydrocarbons (HCs) and sulphur oxides (SO_x).

1.1 Reporting

Inventory compilers should note that differences exist for the reporting of domestic landing/take-off (LTO) and climb/cruise/descent (CCD) (SNAP codes 080501 and 080503, respectively) and international LTO and CCD (SNAP codes 080502 and 080504, respectively) between (1) the Convention on Long-Range Transboundary Air Pollution (CLRTAP) and the National Emission Ceilings (NEC) Directive, and (2) the EU greenhouse gas Monitoring Mechanism Regulation (MMR) for greenhouse gases and the United Nations Framework Convention on Climate Change (UNFCCC). Specifically, these instruments use different definitions with regard to whether the domestic and international LTO/CCD elements should be included within the reported national totals, or should be reported as additional 'memo items'. The United Nations Economic Commission for Europe (UNECE) Reporting Guidelines ⁽²⁾ provide the definitions for the reporting of emissions to the CLRTAP. Any questions concerning the reporting of emissions to the Convention should be addressed to the European Monitoring and Evaluation Programme (EMEP) Centre on Emission Inventories and Projections (CEIP).

⁽¹⁾ 'LTO cycles' refer to landing and take-off cycles. The International Civil Aviation Organization (ICAO) defines an LTO cycle as those activities occurring up to 3 000 ft (914.4 m) above ground level — see ICAO (2011).

⁽²⁾ Available at <http://www.ceip.at>

2 Description of sources


2.1 Aircraft engine emissions

The pollutants produced by aviation mainly come from the combustion of jet fuel and aviation gasoline (the latter is produced by only small aircraft and helicopters equipped with piston engines) that are used as fuel for the aircraft. The main emission species produced are:

- CO₂
- NO_x
- H₂O vapour
- CH₄
- CO
- sulphur oxides (SO_x)
- non-methane volatile organic compounds (NMVOCs)
- particulate matter (PM).

Figure 2.1 depicts the air flow through an aircraft engine and the species that result from the combustion process. The lower part of Figure 2.1 gives an indication of the proportions of each input and output gas.

Figure 2.1 Aircraft fuel combustion

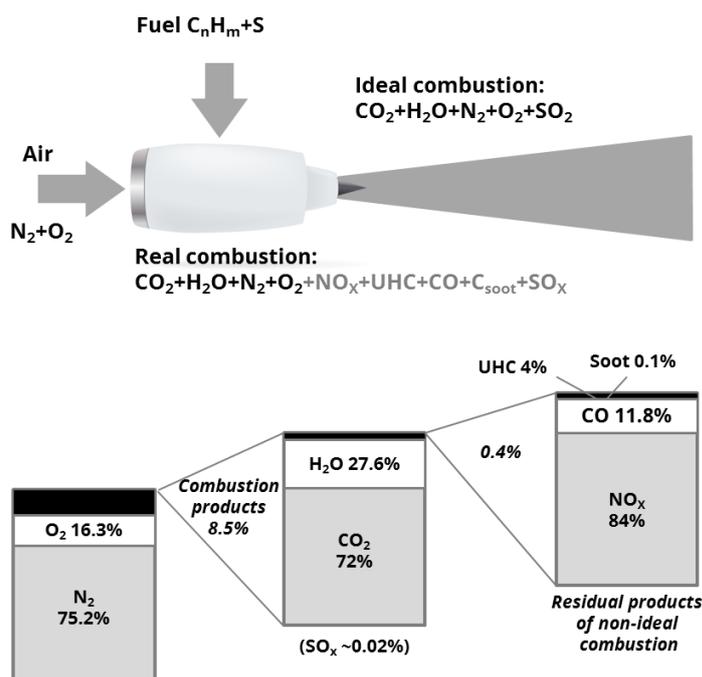

Source: Based on Wuebbles et al., (2007).

2.2 Techniques

2.2.1 Aircraft engines

As shown in Figure 2.2, the main types of aircraft engines are:

- reciprocating (piston) engines
- gas turbine engines.

A reciprocating (piston) engine uses piston and crank mechanisms to extract the energy from fuel burnt in a combustion chamber. This drives the propellers to give the aircraft momentum.

A gas turbine engine compresses air before burning fuel in a combustion chamber, thereby heating it. The major part of the energy produced is used for propelling the aircraft, while a minor portion is used to drive the turbine, which drives the compressor. There are three main types of gas turbine engine: jet engines, which include turbojet and turbofan engines; turboprop engines; and turboshaft engines.

Turbojet engines use only energy from the expanding exhaust stream for propulsion, whereas turbofan and turboprop engines use energy from the turbine to drive a fan or propeller, respectively, for propulsion. Turboshaft engines are a form of gas turbine engine that is optimised to produce shaft power rather than thrust. Turboshaft engines are commonly used in applications, such as in helicopters and aircraft auxiliary power units that require a sustained and high power output, a high degree of reliability, a small size and a low weight.

Note that emissions from aircraft auxiliary power units (APU) are not included in the calculation methodologies described in this chapter.

Figure 2.2 Aircraft engine types

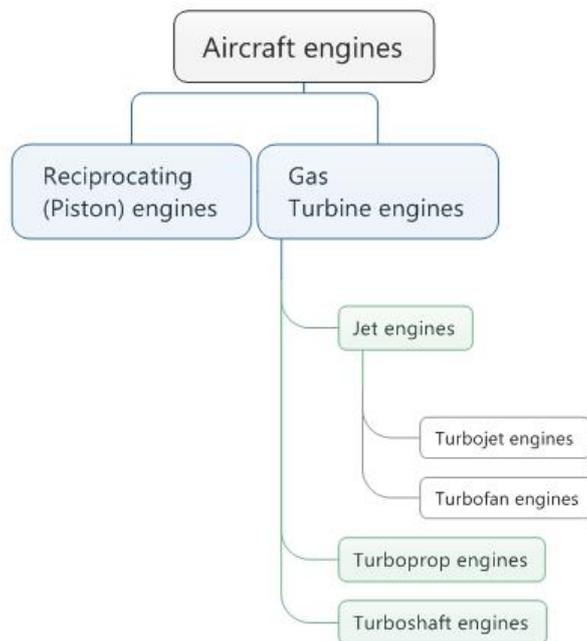


Table 2.1 presents the most-used engine types for each of the most-used aircraft types flying under Instrument Flight Rules (IFR)⁽³⁾ in the European airspace in 2015. It shows that 80 % of IFR flight movements in Europe were performed by only 31 different types of aircraft, which represents only

⁽³⁾ Flights flying under civil Instrument Flight Rules (IFR).

a small percentage of the 546 different types of aircraft identified by EUROCONTROL-STATFOR (Statistics and Forecasts) (EUROCONTROL, 2016d). Each aircraft is of a type that is designated by an International Civil Aviation Organization (ICAO) code, as defined in ICAO 'DOC 8643 — Aircraft Type Designators' (ICAO, 2016a). For example, B738 designates a Boeing 737-800 (amongst others models of the same type), which is an aircraft with two jet engines. In Europe in 2015, the B738 aircraft fleet was mainly equipped with the following engines: the CFM56-7B26, the CFM56-7B24 and the CFM56-7B22. B738 flights accounted for 16.7 % of a total of 9 888 590 IFR flight movements in the European airspace in 2015.

Table 2.1 Flight movements in Europe per aircraft type, 2015

ICAO code	Aircraft name	Number of engines	Engine type	Move-ments (%)	Cumulative % move-ments	Most-common engine types for the specified aircraft
B738	Boeing 737-800	2	J	16.7	16.7	CFM56-7B26, CFM56-7B22, CFM56-7B27
A320	Airbus A-320	2	J	16.3	33.0	CFM56-5B4/P, V2527-A5
A319	Airbus A-319	2	J	9.6	42.7	CFM56-5B5/P, CFM56-5B6/P
A321	Airbus A-321	2	J	5.5	48.2	V2533-A5, CFM56-5B3/P
E190	Embraer ERJ-190	2	J	3.4	51.6	CF34-10E
DH8D	DHC-8-400 Dash 8	2	TP	3.2	54.8	PW150A
B737	Boeing 737-700	2	J	2.1	56.8	CFM56-7B24, CFM56-7B22, CFM56-7B20
A332	Airbus A-330-200	2	J	1.6	58.4	TRENT 772B-60, CF6-80E1A3, PW4168A
CRJ9	CRJ-900 Regional Jet	2	J	1.6	60.0	CF34-8C5
B77W	Boeing 777-300ER	2	J	1.5	61.5	GE90-115B, GE90-115BL2
E170	Embraer 170	2	J	1.4	62.9	CF34-8E5
AT75	ATR-72-500	2	TP	1.3	64.2	PW127F, PW127
A333	Airbus A-330-300	2	J	1.3	65.4	TRENT 772B-60, PW4168A, CF6-80E1A2
B763	Boeing 767-300	2	J	1.3	66.7	PW4060, CF6-80C2B7F, CF6-80C2B6
B733	Boeing 737-300	2	J	1.2	67.9	CFM56-3B1, CFM56-3C1, CFM56-3B2
B752	Boeing 757-200	2	J	1.2	69.1	RB211-535E4, RB211-535E4-B, RB211-535C
AT72	ATR-72-200	2	TP	1.0	70.1	PW124B
B772	Boeing 777-200	2	J	1.0	71.1	GE90-94B, GE90-85B, TRENT 892
B744	Boeing 747-400	4	J	1.0	72.1	CF6-80C2B1F, RB211-524H2, PW4056
DH8A	DHC-8-100 Dash 8	2	TP	0.9	73.0	PW120A
E145	Embraer EMB-145	2	J	0.8	73.8	AE3007A, AE3007A1
B734	Boeing 737-400	2	J	0.8	74.6	CFM56-3C1
B736	Boeing 737-600	2	J	0.7	75.3	CFM56-7B20
RJ1H	RJ-100 Avroliner	4	J	0.7	76.0	LF507-1F
AT76	ATR-72-600	2	TP	0.6	76.6	PW127M

B788	Boeing 787-8 Dreamliner	2	J	0.6	77.2	GENX-64B, TRENT 1000
B735	Boeing 737-500	2	J	0.6	77.8	CFM56-3B1, CFM56-3C1
BE20	Super King Air 200	2	TP	0.6	78.4	PT6A-42, PT6A-41
C56X	Citation XLS	2	J	0.6	78.9	PW545B
F100	Fokker 100	2	J	0.5	79.4	TAY 650-15
SB20	SAAB 2000	2	TP	0.5	80.0	GMA2100A
A388	Airbus A-380-800	4	J	0.5	80.5	TRENT 970-84, GP7270

J, turbofan or turbojet; TP, turboprop.


Source: EUROCONTROL, 2016d.

2.2.2 Phases of flight

As illustrated in Figure 2.3, a typical aircraft flight includes several phases of flight; these are:

- taxi-out
- take-off
- climb-out
- climb
- cruise
- descent
- final approach
- landing
- taxi-in.

Figure 2.3 Typical phases of flight

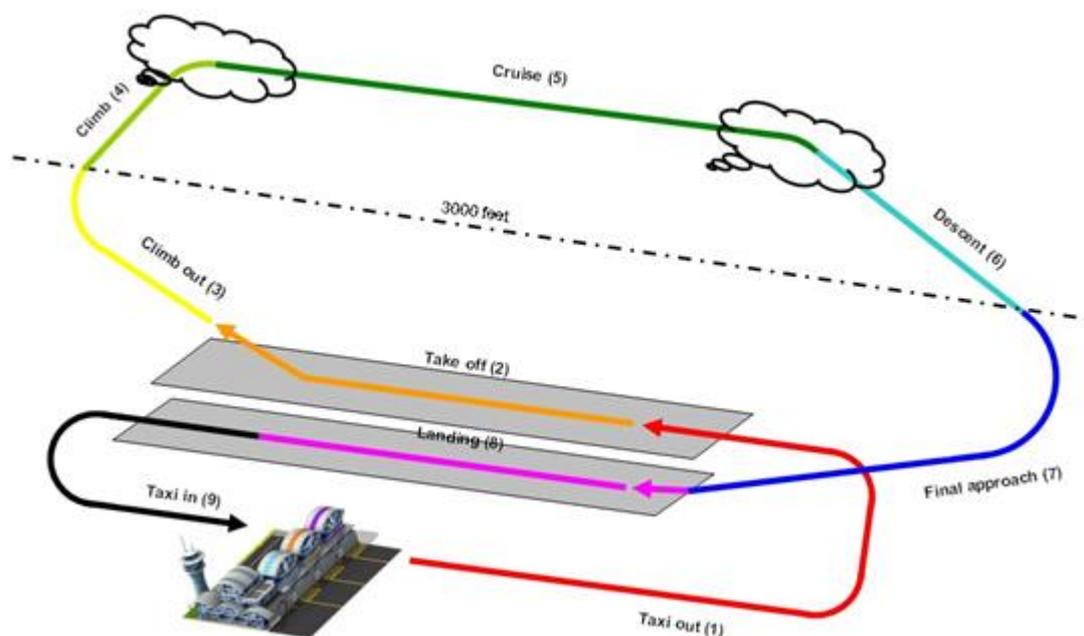

Source: EUROCONTROL

'Taxi-out' is the controlled movement of an aircraft on the ground, under its own power, between its parking area and the point of the runway from which its taking-off operations will occur.

'Take-off' is the phase of flight in which an aircraft moves from the runway to flying in the air.

'Climb' — which in Figure 2.3 is divided into 'climb-out' and 'climb' — is the phase of flight during which the aircraft ascends to a predetermined cruising altitude after take-off. Although a single climb phase is typical, multiple-step climb phases may also occur.

'Cruise' occurs between the climb and descent phases and is usually the longest part of a journey. It ends as the aircraft approaches its destination and the descent phase of the flight commences in preparation for landing. During the cruise phase, because of operational or air traffic control (ATC) reasons, aircraft may climb or descend from one flight level to a higher or lower flight level. During very long flights, aircraft are able to fly higher as the weight of the fuel aboard decreases. Usually, pilots ask ATC to allow them to fly at the optimum flight level for the aircraft they are operating. This optimum flight level is dependent on, for example, the type of aircraft, its operating weight and the length of the flight. ATC generally accept this request if it does not jeopardise safety. For most commercial passenger aircraft, the cruise phase of a flight consumes the majority of the fuel.

'Descent' is the phase of flight during which the aircraft decreases its altitude in preparation for landing and is the opposite of the climb phase. As for the climb, descent can be continuous or stepped as a result of operational or ATC reasons; continuous descent is the most fuel-efficient option.

'Final approach' is the last leg of an aircraft's approach to landing, when the aircraft is in line with the runway and descending for landing.

'Landing' is the part of a flight when an aircraft returns to the ground up to the point at which taxi-in starts.


'Taxi-in' is the movement of an aircraft on the ground, under its own power, that occurs from the point that the aircraft turns off the landing runway (after returning to normal taxi speed) to the point at which it parks on the ground and shuts down its engines.

2.3 Activities related to flight movements

For the purposes of this document, a 'flight movement' starts when an aircraft begins taxiing out and finishes when the aircraft comes to a stop after taxiing in.

Exhaust emissions from aviation arise from the combustion of jet fuel and aviation gasoline. They arise during all activities related to flight movements and can be grouped into groups of activities as shown in Figure 2.4 and listed below:

- pre-departure activities
- departure activities
- CCD activities
- emergency activities
- arrival activities
- post-arrival activities
- maintenance activities.

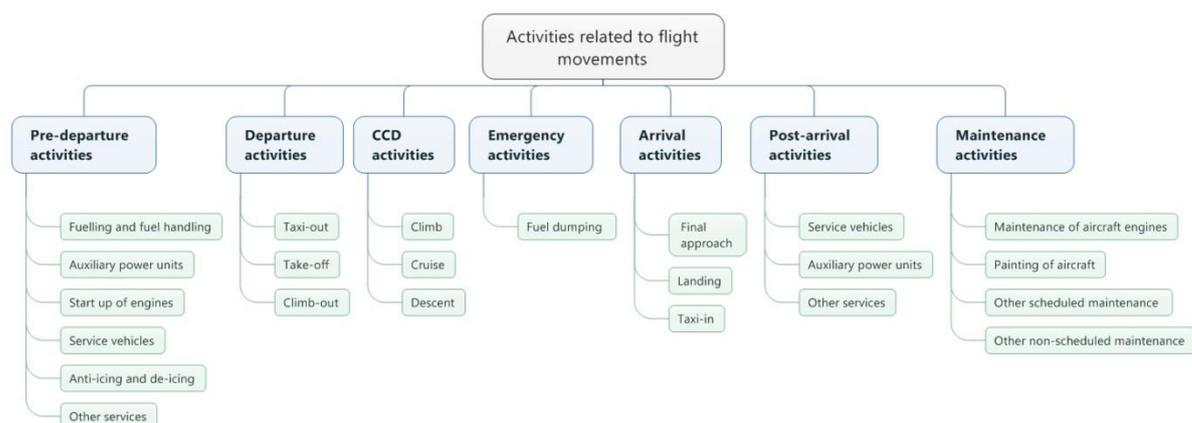Figure 2.4 Activities related to flight movements (source: EUROCONTROL)

Of the activities related to flight movements listed above, the three main activities for which global fuel usage and emissions inventories are possible are:


- departure activities
- CCD activities
- arrival activities.

As illustrated in Figure 2.5, the different activities related to flight movements are described below.

- Departure includes activities near the airport that take place below a height of 3 000 ft (914.4 m). It includes taxi-out, take-off and climb-out.
- CCD is defined as all activities that take place above 3 000 ft (914.4 m). No upper limit of height is given. CCD includes the climb from the end of the climb-out phase up to the cruise altitude, the cruise and the descent from the cruise altitude to the start of the arrival phase.
- Arrival includes activities near the airport that take place below a height of 3 000 ft (914.4 m). It includes the final approach, landing and taxi-in phases of the flight.

Note

In the aviation inventory domain, activities that take place during the departure and arrival phases of a flight are added and reported together as 'landing and take-off' (LTO) activities, while activities that take place during the CCD phases of a flight are added and reported together as 'Cruise' activities.

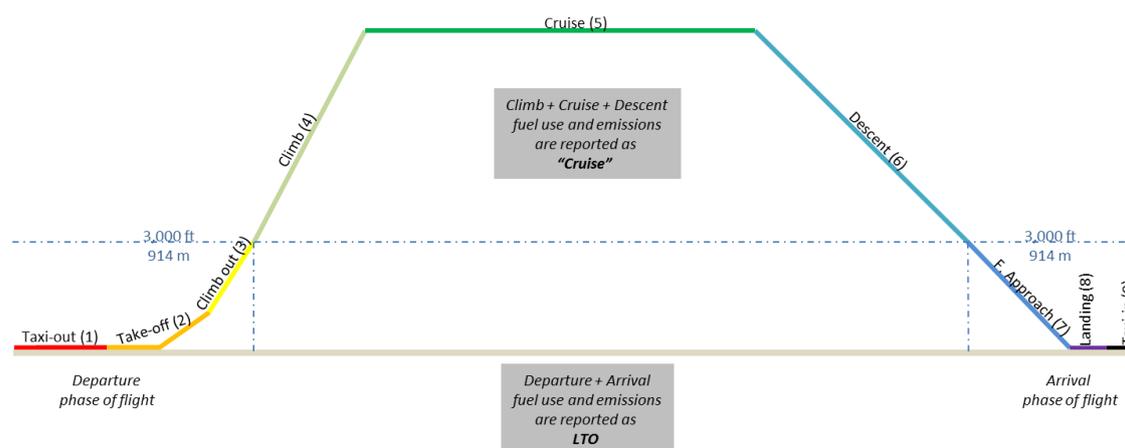Figure 2.5 Aviation inventory activities versus the typical phases of a flight

Source: EUROCONTROL

2.4 Categories of flights included in aviation inventory activities

In principle, there are four categories of flight movements that should be included in aviation activities in a country. These categories are:

- category 1 — IFR flights;
- category 2 — Civil visual flight rule (VFR) flights, also called general aviation;
- category 3 — Civil helicopters;
- category 4 — Operational military flights.

However, for some categories, a country's aviation activity data might be scarce or confidential and therefore cannot be included or accounted for as thoroughly as for the other categories. The different categories are described below.


- Category 1 — Civil IFR flights. This is the category from which most emissions originate. Flight movement data are often recorded for this category of aircraft, and methods for estimating the amount of fuel burnt and emissions generated by this category are quite mature. Aircraft in category 1 can be classified according to the type of engine they are equipped with: turbojet, turboprop or piston.
- Category 2 — Civil VFR flights. This category concerns small aircraft used for leisure, agriculture, taxi flights, etc. Aircraft used for civil VFR flights are generally equipped with turboprop or piston engines.
- Category 3 — Helicopters. This category concerns all types of rotorcraft. Helicopters are often operated under VFR and rarely under IFR. Therefore, it might be difficult to collect precise information on helicopter movements in a country. At present, most helicopters use turboshaft engines to power their rotors, but some small helicopters still use piston engines. It should be noted that the phases of flight schematically represented in Figure 2.3 and Figure 2.5 do not apply to the way in which helicopters manoeuvre.
- Category 4 — Military aircraft. In principle, this category is included in national inventories but the reporting of the emissions from military aircraft is under NFR code 1.A.5, and not 1.A.3.a. However, there may be some difficulties in estimating these activities because of

scarce and often confidential military data. Some movements of military aircraft, such as non-operational activities, might be included in category 1.

2.5 Contribution from aviation to the combustion emissions from mobile sources

Figure 2.6 summarises the contribution of aviation to the combustion emissions from mobile sources.

Figure 2.6 Contribution from aviation to the combustion emissions from mobile sources

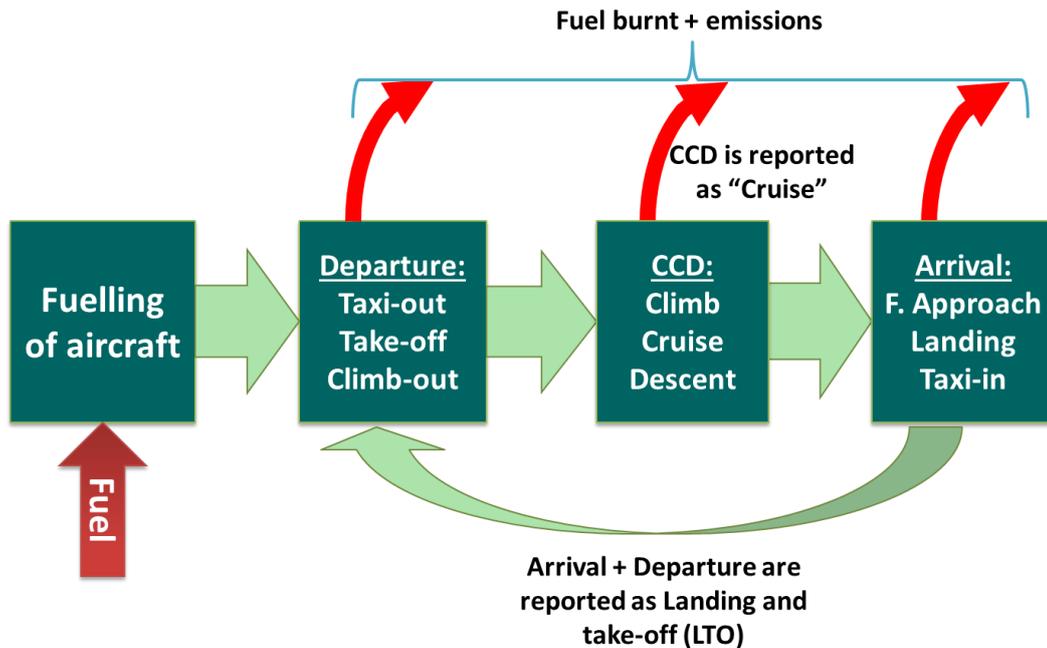

Aviation exhaust emissions are categorised as being 'International' or 'Domestic' depending on whether the arrival airport is, or is not, in the same state as the departure airport (see Table 3.2).

2.6 Controls

Current environmental activities of the ICAO are largely undertaken through the Committee on Aviation Environmental Protection (CAEP). CAEP assists the ICAO Council with the formulation of new policies and the adoption of new Standards and Recommended Practices (SARPs) related to aircraft noise and emissions, and, more generally, the environmental impact of aviation.

So far, the emission species for which there are ICAO standards are:

- NO_x (most recently updated in 2005);
- CO (most recently updated in 1997);
- unburned HCs (most recently updated in 1984);
- engine smoke.

The standards published by ICAO, against which engines are certificated, are given in the form of the total quantity of pollutants (D_p) emitted in an LTO cycle, divided by the maximum sea level thrust (F_{00}) and plotted against the engine pressure ratio at maximum sea level thrust.

Table 2.2 shows engine power settings and times-in-mode for the LTO cycle specified by ICAO (ICAO, 2008a).

Table 2.2 Default ICAO LTO cycle engine thrust settings and times-in-mode

Operating mode	Thrust setting	Time in operating mode (minutes)
Take-off	100 % F_{oo}	0.7
Climb-out	85 % F_{oo}	2.2
Approach-landing	30 % F_{oo}	4.0
Taxi/ground idle	7 % F_{oo}	26.0

The ICAO Aircraft Engine Emissions Databank is maintained by the European Aviation Safety Agency (EASA) on behalf of the ICAO and contains information on exhaust emissions (provided by engine manufacturers) for turbojet and turbofan engines that have entered production (ICAO, 1995).

For turboprop engines, the Swedish Defence Research Agency (FOI) maintains a confidential database of emission indices of NO_x , HCs and CO with corresponding fuel flows. The datasheets in this database have been supplied by turboprop engine manufacturers, originally for the purposes of calculating emissions-related landing charges. Access to the database can be requested via a dedicated webpage (FOI, 2016).

The only source for emissions data for piston engine aircraft is provided by the Federal Office of Civil Aviation (FOCA), which is responsible for aviation development and the supervision of civil aviation activities in Switzerland (FOCA, 2007).

Note: Standards that are expected to be accepted by ICAO in the near future

CO₂ standard

In February 2016, under CAEP recommendations, a new CO₂ emissions standard was established, and was unanimously recommended by the 170 international experts on the ICAO CAEP, paving the way for its ultimate adoption by the United Nations (UN) agency's Governing Council. The standard will not be applicable to only new aircraft type designs as of 2020, but also to new deliveries of current in-production aircraft types from 2023. A cut-off date of 2028 for production of aircraft that do not comply with the standard was also recommended. In its current form, the standard acknowledges CO₂ reductions arising from a range of possible technological innovations, whether structural, aerodynamic or propulsion based. The proposed standard addresses the full range of sizes and types of aircraft used in international aviation, and covers technological feasibility, emissions reduction potential and cost considerations (based on ICAO, 2016b).

'Non-volatile' PM

Aircraft engines burning fuels produce gaseous and PM emissions as by-products of combustion. At the engine exhaust, particulate emissions mainly consist of ultrafine soot or black carbon emissions. Such particles are called 'non-volatile' PM (nvPM). They are present at the high temperatures of the engine exhaust. Compared with traditional diesel engines, gas turbine engine non-volatile particles are typically smaller in size. In February 2016, CAEP recommended the first nvPM standard for aircraft engines with thrust rated greater than 26.7 kN.

The reader is advised to regularly check the ICAO website (<http://www.icao.int/env>) for the most recent information about ICAO standards.

2.7 Contribution of air traffic to total emissions

The total contribution of aircraft emissions to total global anthropogenic CO₂ emissions is considered to be about 2 % (IPCC, 1999). This relatively small contribution to global emissions should be seen in relation to the fact that most aircraft emissions are injected almost directly into the upper free troposphere and lower stratosphere. The Intergovernmental Panel on Climate Change (IPCC) has estimated that the contribution to radiative forcing is about 3.5 %. The importance of this source is growing as the volume of air traffic steadily increases.

The importance of air traffic in Europe with regard to various air pollutants is illustrated in Table 2.3.

Table 2.3 Percentage contributions made by the aviation sector to national total emissions reported by the EU-27 (EU Member States up to 30 June 2013) for the years 1990 and 2013

	Domestic and international LTO (% minimum to maximum)		International cruise (% minimum to maximum)		Domestic cruise (% minimum to maximum)	
	1990	2013	1990	2013	1990	2013
CO	0-0.9	0-5.6	0-1.1	0-1.2	0-0.2	0-1.4
NMVOc	0-0.3	0-1.7	0-1.4	0-0.5	0-0.2	0-0.9
NO _x	0-2.2	0-4.3	0-3.6	0-17	0 - 1.0	0-2.3
PM ₁₀	0-1.1	0-1.5	0-3.1	0-4.8	0-0.1	0-0.2
PM _{2.5}	0-0.8	0-1.9	0-5.8	0-7.6	0-0.1	0-0.2
SO _x	0-0.1	0-2.7	0-1.1	0-5.4	0-0.2	0-0.5

Source: EEA 2015.

3 Methods


3.1 Choice of method

3.1.1 Overview

Figure 3.1 presents the decision tree to follow to determine the appropriate tier method for estimating the total fuel consumption and emissions from aviation. This decision tree is applicable to all nations. When estimating aviation emissions, the following should be considered:

- use as detailed information as is available;
- if the source category is a key source, then a Tier 2 or Tier 3 method must be used to estimate the emissions.

Figure 3.1 Decision tree for determining the appropriate tier method to apply

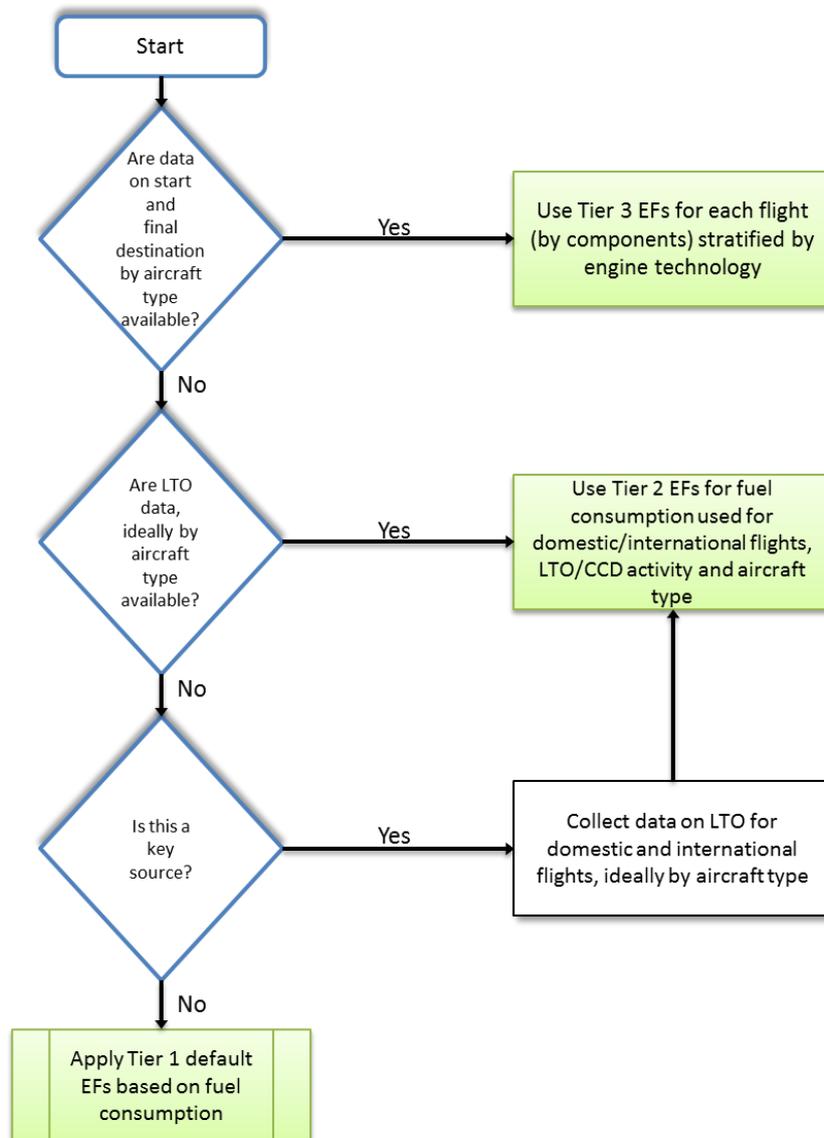

Note: EF – emission factor.

The three tiers are harmonised with those specified in the IPCC 2006 Guidelines (IPCC, 2006).

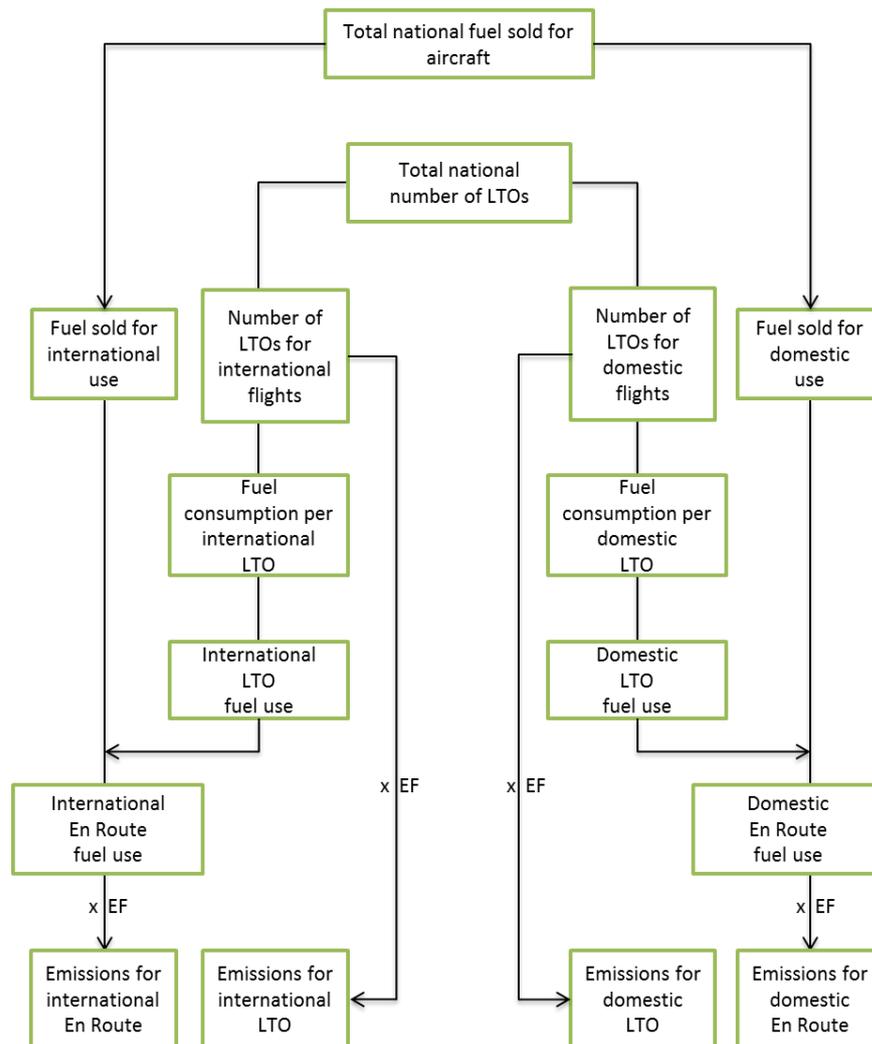
Table 3.1 summarises the data required for use of the three tiers in terms of activity measures. It will often be the case that the overall emissions for category 2 and 3 flights are sufficiently small and that the statistics available are so poor that a Tier 1 approach for these portions of aviation is appropriate.

Table 3.1 Summary of input data required for the three tiers of inventory methodology

Tier	Activity	Data and tools used
Tier 1	Fuel sales sub-divided into domestic and international usage Total LTO numbers for domestic and international	Use average fleet mix (i.e. generic aircraft EFs) and average factors for LTO and CCD
Tier 2	Fuel sales sub-divided into domestic and international use, as for Tier 1 LTO numbers for domestic and international, per aircraft type	Use of aircraft-specific LTO EFs and average EFs for CCD
Tier 3	Data for each flight containing aircraft type and flight distance, sub-divided into domestic and international	Tier 3A: Use specific aircraft type/engine data from the spreadsheet accompanying this chapter, available from the 2016 EMEP/EEA air pollutant emission inventory guidebook (EEA, 2016) website Tier 3B: Use EUROCONTROL Advanced Emission Model (AEM) US/Federal Aviation Administration (FAA) Aviation Environmental Design Tool (AEDT) or similar tools with specific airport taxi times

The Tier 1 and Tier 2 methodologies are based on LTO data and the quantity of fuel sold or used, as illustrated in Figure 3.2. It is assumed that fuel used equals fuel sold. From the total fuel sold for aircraft activities, allocations are made according to the requirements for IPCC and UNECE reporting. The emissions estimation can be made following either the Tier 1 or Tier 2 methodology outlined below.

To estimate the total emissions of CO₂, SO₂ and heavy metals, the Tier 1 methodology is sufficient, as the emissions of these pollutants are dependent on the fuel only and not on the technology. The emissions of PM₁₀ or PM_{2.5} are aircraft and payload dependent. Therefore, when estimating the total emissions of these pollutants, it may be appropriate to consider the aircraft activity in more detail using the Tier 2 methodology. The Tier 3 methodology may be used to get an independent estimate of fuel and CO₂ emissions from domestic and international air traffic.

Figure 3.2 Estimation of aircraft emissions using the Tier 1 and Tier 2 methodologies

3.1.2 Choice of activity data

The way in which the activity statistics are derived is critical to the difference between Tier 1 and 2. Since emissions from domestic aviation are reported separately from international aviation and for LTO and CCD, it is necessary to disaggregate the activity data for these components. This section lays out options regarding how this should be done — this is also consistent with the approach used to estimate greenhouse gases. The basic starting points are national statistics on fuel consumption and, for Tier 2, data on take-offs and landings with more detailed information about aircraft types/engines.

3.1.3 Domestic and international split

To disaggregate between domestic and international activity data, the definitions outlined in Table 3.2 should be applied irrespective of the nationality of the carrier. For consistency, it is good practice to use similar definitions for domestic and international aviation activities. In some cases, the national energy statistics may not provide data consistent with this definition. It is good practice for countries to separate the activity data, consistent with this definition. In any case, a country must clearly define the methodologies and assumptions used.

Table 3.2 Criteria for defining international or domestic aviation (applies to individual legs of journeys with more than one take-off and landing)

Flight between two airports	Domestic	International
Departs and arrives in the same state	Yes	No
Departs from one state and arrives in another	No	Yes

Note

Based on past experience of compiling aviation emissions inventories, difficulties have been identified regarding the international/domestic split, particularly with obtaining the information on passenger and freight drop-off and pick-up at stops in the same country that was required by the IPCC GHG Guidelines (IPCC 1997, 2006). Most flight data are collected on the basis of individual flight segments (from one take-off to the next landing) and do not distinguish between different types of intermediate stops (as called for in *GPG2000*). Basing this distinction on flight segment data (origin/destination) is therefore simpler and is likely to reduce uncertainties. It is very unlikely that this change would make a significant change to the emission estimates ⁽⁴⁾. This does not change the way in which emissions from international flights are reported as a memo item that are not included in national totals.

Improvements in technology and optimisation of airline operating practices have significantly reduced the need for intermediate technical stops. An intermediate technical stop would also not change the definition of a flight as being domestic or international. For example, if explicit data are available, countries may define flight segments as international if they depart from one country with a destination in another country and make an intermediate technical stop. A technical stop is solely for the purpose of refuelling or solving a technical difficulty, and not for the purpose of passenger or cargo exchange.

If national energy statistics do not already provide data consistent with this definition, countries should then estimate domestic and international fuel consumption according to the definition, using the approaches set out below.

Top-down data can be obtained from taxation authorities in cases in which fuel sold for domestic use is subject to taxation, but fuel sold for international use is not taxed. Airports or fuel suppliers may have data on the delivery of aviation kerosene and aviation gasoline for domestic and international flights. In most countries tax and custom dues are levied on fuels for domestic consumption, and fuels for international consumption (bunkers) are free of such dues. In the absence of more direct sources of data, information about domestic taxes may be used to distinguish between domestic and international fuel consumption.

⁽⁴⁾ It is good practice to clearly state the reasoning and justification if any country opts to use the *GPG2000* definitions.

Bottom-up data can be obtained from surveys of airline companies for fuel used for domestic and international flights, or estimates from aircraft movement data and standard tables of fuel consumed or both. Fuel consumption factors for aircraft (fuel used per LTO and per nautical mile cruised) can be used for estimates and may be obtained from the airline companies.

Examples of sources for bottom-up data, including aircraft movements, are:

- statistical offices or transport ministries as a part of national statistics;
- airport records;
- ATC records, for example EUROCONTROL statistics;
- air carrier schedules published monthly by independent providers of travel;
- information which contains worldwide timetable passenger and freight aircraft movements, as well as regular scheduled departures of charter operators.

Some of these sources do not cover all flights (e.g. charter flights may be excluded). On the other hand, airline timetable data may include duplicate flights because of code shares between airlines or duplicate flight numbers. Methods have been developed to detect and remove these duplicates (Baughcum et al., 1998; Sutkus et al., 2001).

3.1.4 Military aircraft

Although military aviation is not reported here, it makes sense to include a basic description of the methodology in this chapter, appropriately cross-referenced from the chapter on NFR code 1.A.5.

Military activities are defined here as those activities using fuel purchased by or supplied to the military authorities of the country. Emissions from aviation fuel use can be estimated using the Tier 1 algorithm and the same calculation approach recommended for civilian aviation. Some types of military transport aircraft and helicopters have fuel and emissions characteristics similar to civil types. Therefore, default emission factors for civil aircraft should be used for military aviation unless better data are available. Alternatively, fuel use may be estimated from the hours in operation. Default fuel consumption factors for military aircraft are given in Tables 3.9 and 3.10.

Military aircraft (transport planes, helicopters and fighters) may not have a civilian equivalent, so a more detailed method of data analysis is encouraged if data are available. Inventory compilers should consult military experts to determine the most appropriate emission factors for a country's military aviation.

Because of confidentiality issues, many inventory compilers may have difficulty obtaining data on the quantity of fuel used by the military. Military activities are defined here as those activities using fuel purchased by or supplied to the military authorities in the country. Countries can apply the rules used to define civilian, national and international aviation operations to military operations if the data necessary to apply those rules are comparable and available. In this case, the international military emissions may be reported under 'International Aviation' ('International Bunkers'), but must then be shown separately. Data on military fuel use should be obtained from government military institutions or fuel suppliers. If data on the international-domestic fuel split are unavailable, all the fuel sold for military activities should be treated as domestic.

Emissions resulting from multilateral operations pursuant to the Charter of the United Nations should not be included in national totals; other emissions related to operations shall be included in the national emissions totals of one or more parties involved. The national calculations should take into account fuel delivered to the country's military, as well as fuel delivered within that country but used by the military of other countries. Other emissions related to operations (e.g. off-road ground

support equipment) shall be included in the national emissions totals in the appropriate source category.

National circumstances may vary, and in particular, distances travelled and fuel consumption may be affected by national route structures, airport congestion and air-traffic control practices.

3.2 Tier 1 fuel-based methodology

3.2.1 Algorithm

The Tier 1 approach for aviation is based on fuel consumption data for aviation divided by LTO and for domestic and international flights separately. The method uses a simple approach to estimate the division of fuel use between CCD and LTO, as shown schematically in Figure 3.2.

The Tier 1 approach for aviation emissions uses the following general equation:

$$E_{pollutant} = AR_{fuel\ consumption} \times EF_{pollutant} \quad (1)$$

where

$E_{pollutant}$ is the annual emission of pollutant for each of the LTO and CCD phases of domestic and international flights;

$AR_{fuel\ consumption}$ is the activity rate by fuel consumption for each of the flight phases and flight types; and

$EF_{pollutant}$ is the emission factor of pollutant for the corresponding flight phase and flight type.

This equation is applied at the national level, using annual national total fuel use data disaggregated for domestic and international flights. Information on fuel consumption for domestic and international flights should be available from national statistics, as described above, or is widely available from UN statistical yearbooks or national statistics. Aircraft emissions estimates according to the Tier 1 approach can be obtained by following the steps detailed in sub-section 3.2.3.

3.2.2 Default emission factors

Tier 1 emission factors ($EF_{Pollutant}$, fuel type) assume an averaged technology for the fleet, and knowledge of the number of domestic and international LTO cycles for the nation. Default fuel and emissions values are presented in the Annex 5 accompanying spreadsheets ('1.A.3.a Aviation – Annex 5 - Master emission calculator 2016' and '1.A.3.a Aviation – Annex 5 - LTO emissions calculator 2016') – a representative aircraft type can be selected if detailed flight movement data are not available. If statistics are available for fuel use and the number of LTOs for domestic and international flights, the assumptions on LTO fuel consumption below can be used to divide these data into LTO and CCD data using equation 1.

$$Total\ fuel = LTO\ fuel + CCD\ fuel \quad (equation\ 1)$$

Where:

$$LTO\ fuel = number\ of\ LTOs \times fuel\ consumption\ per\ LTO$$

$$CCD\ fuel = total\ fuel\ consumption - LTO\ fuel\ consumption$$

Jet kerosene

Using the relationships above and the data in the accompanying spreadsheets (Annex 5), the emissions for the four different NFR codes can be calculated.

Aviation gasoline

Aviation gasoline is assumed to be used for only domestic aviation. Table 3.3 provides the Tier 1 emission factors for NFR 1.A.3.a.ii.(i): Civil aviation (domestic, LTO) for gasoline-fuelled aircraft. The 95 % confidence limits quoted are 50 % and 200 % of the mean values.

Table 3.3 Tier 1 emission factors for NFR 1.A.3.a.ii.(i): Civil aviation (domestic, LTO)

Tier 1 emission factor					
	Code	Name			
NFR Source Category	1.A.3.a.ii.(i)	Civil aviation (domestic, LTO)			
Fuel	Jet Gasoline and Aviation Gasoline				
Not applicable	HCH, PCB, HCB				
Not estimated	NH ₃ , TSP, PM ₁₀ , PM _{2.5} , Pb, Cd, Hg, As, Cr, Cu, Ni, Se, Zn, PCDD/F, Benzo(a)pyrene, Benzo(b)fluoranthene, Benzo(k)fluoranthene, Indeno(1,2,3-cd)pyrene				
Pollutant	Value	Unit	95% confidence interval		Reference
			Lower	Upper	
NO _x	4	kg/tonne fuel	2	8	Calculated using Tier 2 method
CO	1200	kg/tonne fuel	600	2400	Calculated using Tier 2 method
NMVOOC	19	kg/tonne fuel	9.5	38	Calculated using Tier 2 method
SO _x	1	kg/tonne fuel	0.5	2	Assuming 0.05% S by mass

Note: If national PM emission factors are available, a BC fraction of PM (f-BC) equal to 0.15 is suggested (for further information see Annex 3).

3.2.3 Calculation steps of the Tier 1 approach

The Tier 1 approach is based on the premise that data on the quantities of fuel sold for aviation use are available, most probably from nationally collected data. It also assumes that the annual quantity of fuel used is the same as that sold.

Information on the country's total number of LTOs must be available, preferably also the destination (long and short distance) for international LTOs, together with a general knowledge about the aircraft types carrying out aviation activities.

Aircraft emissions estimates according to the Tier 1 methodology can be obtained by following the steps outlined below.

1. Obtain the **total** amount of **fuel** sold for all aviation (in ktonnes).
2. Obtain the amount of **fuel** used for **domestic** aviation only (in ktonnes).
3. Calculate the total amount of **fuel** used for **international** aviation by subtracting the domestic aviation (step 2) from the total fuel sold (step 1).
4. Obtain the **total number of LTOs** carried out for domestic aviation.

5. Calculate the **total fuel use for LTO activities** for domestic aviation by multiplying the number of domestic LTOs by the domestic fuel use factors for one representative aircraft (see Annex 5: '1.A.3.a Aviation – Annex 5 - LTO emissions calculator 2016') (quantity obtained in step 4 multiplied by fuel use for representative aircraft).
6. Calculate the **fuel used for CCD activities** for domestic aviation by subtracting the fuel used for domestic LTO (step 5) from the total domestic fuel used (step 2).
7. Estimate the **emissions related to domestic LTO activities** by multiplying the emission values (per LTO) for domestic traffic with the number of LTOs for domestic traffic. Emission values are suggested for old and average-aged fleet by representative aircraft (see Annex 5: '1.A.3.a Aviation – Annex 5 - LTO emissions calculator').
8. Estimate the **emissions related to domestic CCD activities** by multiplying the corresponding emission values (in emissions/fuel used) in 1.A.3.a Aviation – Annex 5 - LTO emissions calculator' with the domestic CCD fuel use. Emission factors are suggested for an old and an average-aged fleet by representative aircraft.
9. Repeat steps 4 to 8 but substitute domestic activities with **international activities**. For international flights, it is preferable to distinguish between short- (< 1 000 nm ⁽⁵⁾) and long-distance (> 1 000 nm) flights. The latter is normally performed by large fuel-consuming aircraft compared with the shorter distance flights (e.g. within Europe). If this distinction cannot be made, the LTO emissions are expected to be largely overestimated in most countries.

3.3 Tier 2 method

3.3.1 Algorithms

The Tier 2 approach can be applied if it is possible to obtain information on LTOs per aircraft type but there is no information available on CCD distances. Information on the aircraft types used for both domestic and international aviation, together with the number of LTOs carried out by the various aircraft types, is necessary for this methodology.

Apart from this level of further detail according to aircraft type, the algorithms are the same as for the Tier 1 approach:

$$E_{\text{pollutant}} = \sum_{\text{Aircraft types}} AR_{\text{fuel consumption, aircraft type}} \times EF_{\text{pollutant, aircraft type}} \quad (2)$$

where, as before, $E_{\text{pollutant}}$ is the annual emission of pollutant for each of the LTO and CCD phases of domestic and international flights; $AR_{\text{fuel consumption, aircraft type}}$ is the activity rate by fuel consumption for each of the flight phases and flight types, for each aircraft type; and $EF_{\text{pollutant, aircraft type}}$ is the emission factor of pollutant for the corresponding flight phase and flight type, for each aircraft type.

3.3.2 Aircraft-specific fuel used and emission values

Table 3.4 is an extract from the Annex 5 of the aviation chapter "1.A.3.a Aviation – Annex 5 - Master emissions calculator 2016" that lists LTO fuel consumption and emission factors for certain aircraft types with their most frequent engine types. Note that the values provided in Table 3.4 for LTO are based on standard ICAO taxi times and these may differ significantly from average taxi times at European airports. In addition, the Annex 5 of the aviation chapter "1.A.3.a Aviation – Annex 5 - LTO

⁽⁵⁾ Where nm = nautical miles, 1 nm = 1 852 km.

emissions calculator 2016”, provides a means to easily estimate the amount of fuel used and emissions exhausted during the LTO cycles of a large range of aircraft at a particular European airport for a particular year between 2005 and 2015 based on average taxi times. The average taxi time has been provided by EUROCONTROL’s Central Office of Delay Analysis (CODA). The fuel burnt and emission data in both of these spreadsheets have been provided by EUROCONTROL with the aim of supporting the European Union and EU Member States in the maintenance and provision of European and national emission inventories. These fuel burn and emission data are modelled estimates and not 'absolute' values and should not be used for comparing fuel efficiency and emission data between aircraft models and manufacturers. The engine associated to each aircraft type is the most common type of engine used for each aircraft type in 2015.

Table 3.4 Examples of aircraft types and emission values for LTO cycles as well as fuel consumption per aircraft type, in kg/LTO (ICAO default LTO duration: 32 minutes and 54 seconds)

Aircraft type	Manufacturer	Engine type	Engine ID	Nb of engines	Fuel burn (kg)	CO ₂ (kg)	NO _x (kg)	SO _x (kg)	H ₂ O (kg)	CO (kg)	HC (kg)	PM TOTAL (kg)
A306	AIRBUS	Jet	1PW048	2	1723.14	5427.89	25.86	1.45	2119.46	14.8	1.25	0.14
A310	AIRBUS	Jet	2GE037	2	1530.55	4821.24	18.68	1.29	1882.58	13.92	1.2	0.1
A319	AIRBUS	Jet	3CM027	2	688.81	2169.76	7.46	0.58	847.24	9.49	1.96	0.06
A320	AIRBUS	Jet	3CM026	2	816.17	2570.93	11.28	0.69	1003.89	8.25	1.64	0.07
A332	AIRBUS	Jet	14RR071	2	2168.08	6829.44	35.32	1.82	2666.73	21.19	2.1	0.16
A333	AIRBUS	Jet	14RR071	2	2168.08	6829.44	35.32	1.82	2666.73	21.19	2.1	0.16
A343	AIRBUS	Jet	2CM015	4	2019.89	6362.65	34.81	1.7	2484.46	25.23	3.9	0.5
A345	AIRBUS	Jet	8RR044	4	3279.12	10329.23	57.78	2.75	4033.31	15.92	0.24	0.2
A346	AIRBUS	Jet	8RR045	4	3372.96	10624.82	64.67	2.83	4148.74	15.05	0.23	0.2
A380	AIRBUS	Jet	8RR046	4	4142.4	13048.56	67.26	3.48	5095.15	29.62	0.38	0.25
B737	BOEING	Jet	3CM032	2	824.65	2597.65	10.3	0.69	1014.32	8	0.86	0.07
B738	BOEING	Jet	8CM051	2	881.1	2775.47	12.3	0.74	1083.75	7.07	0.72	0.07
B742	BOEING	Jet	3GE077	4	3074.57	9684.89	47.54	2.58	3781.71	27.46	3.15	0.29
B743	BOEING	Jet	3GE077	4	3074.57	9684.89	47.54	2.58	3781.71	27.46	3.15	0.29
B744	BOEING	Jet	2GE045	4	3319.68	10456.98	44.45	2.79	4083.21	25.27	2.05	0.21
B752	BOEING	Jet	5RR038	2	1362.6	4292.19	14.98	1.14	1676	12.25	0.17	0.16
B753	BOEING	Jet	5RR039	2	1463.64	4610.47	17.85	1.23	1800.28	11.63	0.11	0.17
B762	BOEING	Jet	1GE012	2	1462.66	4607.37	23.76	1.23	1799.07	14.8	3.32	0.16
B763	BOEING	Jet	12PW101	2	1729.93	5449.29	26.67	1.45	2127.82	29.65	7.56	0.16
B772	BOEING	Jet	8GE100	2	2406.41	7580.19	61.24	2.02	2959.88	12.31	0.44	0.16
B773	BOEING	Jet	2RR027	2	2562.84	8072.95	52.8	2.15	3152.29	12.76	0.66	0.16
B77W	BOEING	Jet	7GE099	2	3090.84	9736.15	69.79	2.6	3801.73	47.54	5.1	0.21
B788	BOEING	Jet	11GE136	2	3474.43	10944.46	49.8	2.92	4273.55	7.97	0.3	0.25
DC8	MCDONNELL DOUGLAS	Jet	1CM003	4	1695.19	5339.85	15.62	1.42	2085.08	26.32	1.51	0.12
DC10	MCDONNELL DOUGLAS	Jet	3GE074	3	2305.93	7263.67	35.65	1.94	2836.29	20.59	2.37	0.22
E175	EMBRAER	Jet	8GE108	2	481.56	1516.91	4.44	0.4	592.32	4.11	0.04	0.03
F27	FOKKER	Turboprop	Turboprop	2	217.15	684.03	0.3	0.18	267.1	18.65	13.48	0
MD11	MCDONNELL DOUGLAS	Jet	2GE049	3	2627.91	8277.92	38.17	2.21	3232.33	18.28	1.43	0.17
T39	SABRELINER	Jet	1AS002	2	183.68	578.6	1.69	0.15	225.93	4.51	0.79	0.13

Notes: * Denotes engine types that have been updated or changed from the previous version of the table.
UID – Unique identifier.

3.3.3 Calculation steps for Tier 2

The Tier 2 methodology is predominantly a top-down (fuel-sold) methodology that uses statistics on aviation fuel consumption (split by domestic and international). To split the fuel use by LTO and CCD, detailed LTO activity data and knowledge of aircraft fleet composition are needed to provide a more accurate inventory as opposed to using only average emission factors per mass of fuel used (the Tier 1 approach). The Tier 2 methodology should include all types of aircraft frequently used for

domestic and international aviation. The two accompanying spreadsheets (Annex 5) available from the 2016 [EMEP/EEA air pollutant emission inventory guidebook \(EEA, 2016\)](#) website ('1.A.3.a Aviation – Annex 5 - Master emission calculator 2016' and '1.A.3.a Aviation - Annex 5 - LTO emissions calculator 2016') provide a way of mapping actual aircraft to representative aircraft types in the database.

The approach involves the steps outlined below.

1. Obtain the **total amount of fuel** sold for all aviation (in ktonnes).
2. Obtain the total amount of **fuel** used for **domestic aviation** (in ktonnes).
3. Calculate the amount of **fuel used for international aviation** by subtracting the domestic aviation (step 2) from the total fuel sold (step 1) (in ktonnes).
4. Obtain the total **number of LTOs** carried out **per aircraft type** for domestic aviation. As mentioned above in this chapter, the spreadsheet '1.A.3.a Aviation annex 2 2016' contains data on most aircraft types.
5. Calculate the **fuel use for LTO activities** per aircraft type for domestic aviation. For each aircraft type, multiply the fuel use factor in the spreadsheet accompanying this chapter (Annex 5 '1.A.3.a Aviation – Annex 5 - LTO emissions calculator 2016'). The calculations are carried out for all types of generic aircraft. Calculate the total fuel use for LTO activities by summing all contributions found under step 5 for domestic aviation. If some types of national aircraft in use are not found in the table, use a similar type taking into account size and age. For LTOs for smaller aircraft and turboprops, also see section 3.4.1 that includes information on non-IFR flights.
6. Calculate the **total fuel use for domestic CCD** by subtracting the total amount of fuel for LTO activities found in step 5 from the total in step 2 (estimated as for the Tier 1 methodology).
7. Estimate the **emissions from domestic LTO activities** per aircraft type. The number of LTOs for each aircraft type is multiplied by the emission factor related to the particular aircraft type and pollutant. This is done for all generic aircraft types. Relevant fuel use and emission values can again be found in the spreadsheet accompanying this chapter (Annex 5 '1.A.3.a Aviation – Annex 5 - LTO emissions calculator 2016'). If some types of national aircraft in use are not found in this spreadsheet, use a similar type taking into account size and age. For LTOs for smaller aircraft, also see the section on non-IFR flights. Their emissions will have to be estimated separately by a simpler method.
8. Estimate the emissions from domestic **CCD activities**. Use the domestic CCD fuel use and the corresponding emission factor for the most common aircraft type used for domestic CCD activities (the Tier 1 or Tier 3 methodology). Relevant fuel use and emission values can be found in the accompanying spreadsheet for the Tier 3 methodology ('Annex 5 '1.A.3.a Aviation – Annex 5 - LTO emissions calculator 2016').
9. Calculate the **total emissions for LTO activities** for domestic aviation. Add all contributions from the various aircraft types as found under step 7. The summations shall take place for each of the pollutants for which emissions are to be estimated (for CO₂, NO_x, SO₂, etc.).
10. Calculate the **total emissions for CCD activities** for domestic aviation. Add all contributions from the various aircraft types as found under step 8. The summations shall take place for each of the pollutants for which emissions are to be estimated (for CO₂, NO_x, SO₂, etc.).
11. Repeat the calculation (steps 4–10) for **international aviation**.

3.3.4 Abatement

The technology abatement approach is not relevant for this methodology.

3.3.5 Military aircraft

The Tier 2, that is, aircraft type-specific, methodology is also applicable to the calculation of the emissions from military aircraft. However, it should be noted that the reporting of emissions from military aircraft is under NFR code 1.A.5, not 1.A.3.a.

There are two potential activity indicators:

- total fuel used by military aircraft;
- number of flight hours per aircraft type, multiplied by average fuel consumption in kg/hour.

The accompanying Annex 5 spreadsheets '1.A.3.a Aviation – Annex 5 - Master emission calculator 2016' and '1.A.3.a Aviation - Annex 5 - LTO emissions calculator 2016' provide some generic and aircraft-specific fuel consumption data for military aircraft. The emission factors given in the abovementioned spreadsheets (which are per unit of fuel combusted) can then be used with the fuel-used data to calculate emissions.

Table 3.5 Fuel consumption factors for generic military aircraft

Group	Sub-group	Representative type	Fuel flow (kg/hour)
1. Combat	Fast jet — high thrust	F16	3 283
	Fast jet — low thrust	Tiger F-5E	2 100
2. Trainer	Jet trainers	Hawk	720
	Turboprop trainers	PC-7	120
3. Tanker/transport	Large tanker/transport	C-130	2 225
	Small transport	ATP	499
4. Other	MPAs, maritime patrol	C-130	2 225

Source: ANCAT, British Aerospace/Airbus.

Table 3.6. Fuel consumption per flight hour for specific military aircraft

Aircraft Type	Aircraft description	Fuel use (litres per hour)
A-10A	Twin engine light bomber	2 331
B-1B	Four engine long-range strategic bomber; used by USA only	13 959
B-52H	Eight engine long-range strategic bomber; used by USA only	12 833
C-12J	Twin turboprop light transport; Beech King Air variant	398
C-130E	Four turboprop transport; used by many countries	2 956
C-141B	Four engine long-range transport; used by USA only	7 849
C-5B	Four engine long-range heavy transport; used by USA only	13 473
C-9C	Twin engine transport; military variant of DC-9	3 745
E-4B	Four engine transport; military variant of Boeing 747	17 339
F-15D	Twin engine fighter	5 825
F-15E	Twin engine fighter-bomber	6 951
F-16C	Single engine fighter; used by many countries	3 252

KC-10A	Three engine tanker; military variant of DC-10	10 002
KC-135E	Four engine tanker; military variant of Boeing 707	7 134
KC-135R	Four engine tanker with newer engines. Boeing 707 variant	6 064
T-37B	Twin engine jet trainer	694
T-38A	Twin engine jet trainer; similar to F-5	262

3.4 Tier 3 flight- and aircraft-type methodology

The Tier 3 methodologies are based on actual flight movement data, either for Tier 3A origin and destination (OD) data or for Tier 3B full flight trajectory information. These methodologies are bottom-up, flight-based, rather than top-down calculation-based, on the fuel consumed. An example of a system implementing a Tier 3 methodology is provided in Annex 4.

Tier 3A takes into account CCD emissions for different flight distances. Consequently, details on the origin (departure) and destination (arrival) airports and aircraft type are needed to use this approach, for both domestic and international flights. In Tier 3A, inventories are modelled using average fuel consumption and emissions data for the LTO phase and various CCD phase lengths, for an array of representative aircraft categories.

The Tier 3A methodology takes into account that the quantity of emissions generated varies between phases of flight. It also takes into account that fuel burn is related to flight distance, while recognising that this fuel burn can be comparably higher over relatively short distances than on longer routes. This is because aircraft use more fuel per distance for the LTO cycle compared with the 'en-route' phase.

The Tier 3B methodology is distinguished from the Tier 3A methodology by the calculation of fuel burnt and emissions throughout the full trajectory of each flight segment using aircraft- and engine-specific aerodynamic performance information. To use Tier 3B, sophisticated computer models are required to address all the equipment, performance and trajectory variables and calculations for all flights in a given year.

Models used for Tier 3B calculations can generally specify output in terms of the aircraft, engine, airport, region and global totals, as well as by latitude, longitude, altitude and time, for fuel burnt and emissions of CO, HCs, CO₂, H₂O, NO_x and SO_x. To be used in preparing annual inventory submissions, a Tier 3B model must calculate aircraft emissions from input data that take into account air-traffic changes, aircraft equipment changes or any input-variable scenario.

Ideally, the components of Tier 3B models should be designed to be readily updated so that the models are dynamic and can remain current with evolving data and methodologies. A list of Tier 3B models can be found on the ICAO CAEP Modelling and Databases Group (MDG) web page ⁽⁶⁾.

The Tier 3 methodology described in this chapter only relates to Tier 3A.

3.4.1 Tier 3A fuel use and emission values

As for Tier 2 emissions, the values for CO₂, SO₂ and heavy metals are based on the fuel used, and PM values are calculated from the PM_{2.5} emissions. The emissions of NO_x, HC, CO and smoke, as well as the fuel used, are calculated on a flight-by-flight basis using emission values available from the accompanying Annex 5 spreadsheets to the chapter, which are available from the 2016 [EMEP/EEA air pollutant emission inventory guidebook \(EEA, 2016\)](http://www.eea.europa.eu/air/pollutant-emission-inventory-guidebook) website.

⁽⁶⁾ <http://www.icao.int/environmental-protection/Pages/modelling-and-databases.aspx>

Instrument flight rules (IFR) flights

The fuel used and emission values for the Tier 3 methodology for more than 250 jets and turboprop engines and for different flight distances are provided in the spreadsheet accompanying this chapter; this spreadsheet is available from the 2016 [EMEP/EEA air pollutant emission inventory guidebook \(EEA, 2016\)](#) website.

Note: The fuel burnt and emissions data provided in the accompanying Annex 5 spreadsheets are for supporting the EU and EU Member States in the maintenance and provision of European and national homogeneous emissions inventories. These data should not be used to compare fuel efficiency and emissions data between aircraft models and manufacturers.

Note: The updated fuel burnt and emissions values provided in the spreadsheet accompanying this chapter were calculated by using the EUROCONTROL Impact noise and emissions model to derive/generate the 'more fuel efficient' trajectory for each couple (aircraft airframe/engine(s)) selected for a selection of stage lengths within maximum observed stage length for this aircraft airframe, then by processing the trajectories obtained with the EUROCONTROL Advanced Emission Model (AEM) (version 2.5.3) in stand-alone mode, for calculating the fuel burnt and emissions values. These values are significantly different from the values obtained previously with the older 'PIANO' model. A detailed description of how these data were calculated is provided in the spreadsheet itself, as well as the exact list of the aircraft airframe and engine(s) pairs covered.

Table 3.7 Illustrative spreadsheet output for a Boeing 737-400 equipped with two 8CM051 engines.

Aircraft code	Manufacturer	BOEING	Engine type Most common engine id used for modelling this aircraft type, year	Jet	Defaults LTO (1) cycle in hh:mm:ss
	One of the models associated with this aircraft type	737-400		8CM051	
B734	Category	Landplane	Number of engines	2	

Aircraft type	B734	Most frequently observed cruise flight level	ESTIMATIONS										
			Duration in hh:mm:ss	Fuel burn in kg	CO2 in kg	NOx in kg	SOx in kg	H2O in kg	CO in kg	HC in kg	PM non volatile in kg	PM volatile (organic-s)	PM TOTAL in kg (3)
Default LTO (1) cycle (see	BOEING	275	00:26:56	800.25	2 520.79	11.92	0.67	984.31	5.55	0.57	0.0228	0.0465	0.0692
			ICAO	00:32:54	881.10	2 775.47	12.30	0.74	1083.75	7.07	0.72	0.0228	0.0514
Enter here an CCD stage length in nm.	275	280	00:43:19	1851.29	5 831.57	30.95	1.56	2 277.08	5.03	0.64	0.0387	0.1500	0.1887
275			01:16:13	2 732.39	8 607.03	43.25	2.30	3 360.84	12.09	1.37	0.0615	0.2014	0.2629

(1) LTO	Landing and Take-Off flight phases	(2) CCD	Climb/Cruise/Descent flight phases
(3) PM TOTAL	Total particulate matter emitted. As practically all PM emitted by modern transport aircraft has an aerodynamic diameter of less than 0.1 microns, this method considers that the masses of PM0.1, PM2.5, PM10 and total PM are identical.		

Aircraft type	B734	Most frequently observed cruise flight level	ESTIMATIONS												
			Duration in hh:mm:ss	Fuel burn in kg	CO2 in kg	NOx in kg	SOx in kg	H2O in kg	CO in kg	HC in kg	PM non volatile in kg	PM volatile (organic-s)	PM TOTAL in kg (1)		
Default LTO (1) cycle (see	BOEING	275	00:26:56	800.25	2 520.79	11.92	0.67	984.31	5.55	0.57	0.0228	0.0465	0.0692		
			ICAO	00:32:54	881.10	2 775.47	12.30	0.74	1083.75	7.07	0.72	0.0228	0.0514	0.0741	
CCD stage length	275	280	125	180	00:23:00	964.26	3 037.42	16.73	0.81	1186.04	3.42	0.39	0.0355	0.0677	0.1032
			200	270	00:33:00	1406.30	4 429.85	24.70	1.18	1729.75	4.56	0.56	0.0387	0.1090	0.1477
			250	280	00:39:53	1708.02	5 380.28	29.01	1.43	2 100.87	4.88	0.62	0.0387	0.1361	0.1748
			500	320	01:14:14	3 140.69	9 893.16	48.41	2.64	3 863.04	6.31	0.89	0.0387	0.2752	0.3139
			750	360	01:50:26	4 584.45	14 441.01	67.50	3.85	5 638.88	7.79	1.20	0.0413	0.4339	0.4752
			1000	380	02:25:48	6 015.68	18 949.40	86.90	5.05	7 399.29	8.99	1.54	0.0413	0.6216	0.6629
			1500	380	03:36:27	8 987.17	28 309.60	126.75	7.55	11 054.24	11.32	2.11	0.0443	0.9431	0.9874
			2000	380	04:47:02	12 024.99	37 878.72	168.00	10.10	14 790.81	13.72	2.66	0.0497	1.2486	1.2983

Note: The values provided for LTO in Table 3.10 are based on standard ICAO taxi times. These may differ significantly from average taxi times at European airports. The Annex 5 spreadsheet '1.A.3.a Aviation 2 LTO emissions calculator 2016 available from the 2016 [EMEP/EEA air pollutant emission inventory guidebook \(EEA, 2016\)](#) website provides the means to calculate fuel used and emissions LTO values for all European airports from 2005 to 2015.

Non-Instrument Flight Rules (non-IFR) flights

There is little information available on emission factors for non-IFR flights and it is, at present, not possible to recommend default emission factors. Generally, the NOx emission factors will be lower than for IFR flights and the CO and VOC factors substantially higher.

Fuel consumption factors are given for two categories of aircraft (Cessna and others) and these should be used if other information on fuel used is not available (Table 3.8 and Table 3.9). Please

note that the tables apply to single-engine aircraft only. If the aircraft is fitted with two engines (e.g. Cessna 500), then the fuel consumption should be doubled. Ranges of emission factors are shown in MEET (1997). A summary is given in Table 3.10.

Some emission factors and fuel-use factors for helicopters and military flights are given in Table 3.11, Table 3.12 and Table 3.13. Also note that many types of military aircraft may have civil equivalents.

Table 3.8 Fuel consumption for piston-engined aircraft

Cessna C 152, C 172 and C 182 (single engine)	Altitude		
	0 ft	2 000 ft	4 000 ft
75 % power (= 135 horsepower (HP))	41 litre/hour	42 litre/hour	No data
70 % power (= 126 HP)	37 litre/hour	38 litre/hour	39 litre/hour
65 % power (= 117 HP)	33.5 litre/hour	34 litre/hour	34.5 litre/hour

Note: For an average, use 36 litre/hour.

Table 3.9 Fuel consumption for non-Cessna aircraft

Robin (French aircraft), various Piper types (single engine)	Altitude	
	0 ft	4 000 ft
70 % power	36.5 litre/hour	No data
64 % power	34 litre/hour	33.5 litre/hour
58 % power	31 litre/hour	31 litre/hour

Note: For an average, use 33 litre/hour.

Table 3.10 Examples of emission factors for piston-engined aircraft in g/kg fuel

Piston-engine aircraft type	NO _x	HC	CO	SO ₂
Netherlands FL 0–30	2.70	20.09	1 054	0.21
FL 30–180	4.00	12.50	1 080	0.17
Germany	3.14	18.867	798	0.42

Note: Multiply FL by 100 to obtain the altitude in ft.

Source: MEET (1997).

Table 3.11 Examples of emission factors for helicopters and military flights in selected countries g/kg fuel

Country	Nature of flights	NO _x	HC	CO	SO ₂
Germany	LTO cycle	8.3	10.9	39.3	1.1
	Helicopter CCD	2.6	8.0	38.8	1.0
	Combat jet	10.9	1.2	10.0	0.9
	Cruise 0.46–3 km	10.7	1.6	12.4	0.9
	Cruise > 3 km	8.5	1.1	8.2	0.9
Netherlands	Average	15.8	4.0	126	0.2
	F-16	15.3	3.36	102	0.2
Switzerland	LTO cycle	4.631	2.59	33.9	1.025
	CCD	5.034	0.67	14.95	0.999

Notes: If national PM emission factors are available, a BC fraction of PM (f-BC) of 0.48 is suggested (for further information see Annex 3).

Source: MEET (1997).

Table 3.12 Emission factors for helicopters of selected countries in g/kg fuel

Country	NO _x	HC	CO	SO ₂
Germany: CCD	2.6	8.0	38.8	0.99
Netherlands: CCD	3.1	3.6	11.1	0.20
Switzerland	13.3	0.3	1.1	0.97

Source: MEET (1997).

Table 3.13 Fuel consumption factors for military aircraft

Group	Sub-group	Representative type	Fuel flow kg/hour
1. Combat	Fast jet — high thrust	F16	3 283
	Fast jet — low thrust	Tiger F-5E	2 100
2. Trainer	Jet trainers	Hawk	720
	Turboprop trainers	PC-7	120
3. Tanker/transport	Large tanker/transport	C-130	2 225
	Small transport	ATP	499
4. Other	MPAs, maritime patrol	C-130	2 225

Source: ANCAT, British Aerospace/Airbus.

3.4.2 Tier 3A algorithm

The Tier 3A methodology is based on actual flight movement data.

The amount of fuel used and emission species are calculated using the emission values described in sub-section 3.4, and the flight movement data obtained nationally or through organisations collecting such information.

Instrument flight rules (IFR) flights

The total emissions from aircraft are given by the sum of emissions from various technologies of aircraft in a continuous set of flying modes. In this methodology, the calculations are simplified by classifying the aircraft into a representative set of generic aircraft types and into two classes of flying modes: LTO and CCD. However, the methodology allows adjustment for actual times-in-mode of LTO at individual airports. This method also permits the use of individual aircraft/engine combinations if data are available.

The methodology involves the steps outlined below.

1. Collect flight details from national data, for example civil aviation records, airport records, from the EUROCONTROL agency in Europe or the schedule timetable. This will identify the aircraft that were used in the inventory period, the number of LTOs for each and the distance flown.
2. For the aircraft actually flying, select the aircraft used to represent these aircraft from the table of equivalent aircraft ('1.A.3.a Aviation annex 1 2016' and '1.A.3.a Aviation annex 2 2016'). This is called the 'representative aircraft'. See also sub-section 0 on 'Non-Instrument Flight Rules flights' below. Their emissions will have to be estimated separately by a simpler method.

3. See sub-section 3.1.2 'Choice of activity data' for a description of how activity data can be determined.
4. From the attached spreadsheet (available from the 2016 [EMEP/EEA air pollutant emission inventory guidebook \(EEA, 2016\)](#) website), select an aircraft type. The spreadsheet will automatically provide the fuel used and the emissions data corresponding to the LTO phase for the representative aircraft, as well as the fuel used and the amount of emissions data for the CCD portion of the flight for a series of pre-determined stage lengths.
5. For a specific distance not listed in the pre-determined stage lengths, simply enter the distance in the 'CCD stage length box' and the spreadsheet will automatically perform a linear interpolation to calculate the corresponding amount of fuel used and the emissions.
6. The total quantity of fuel used for the flight is the sum of the fuel used for LTO plus the fuel used for the CCD portion of the flight.
7. The total level of pollutants emitted during the flight is the sum of the pollutants emitted in the LTO phase plus the quantity emitted in the CCD portion of the flight.

The use of energy, and therefore emissions, depends on the aircraft operations and the time spent at each stage. Table 2.2 shows engine power settings and times-in-mode for the LTO cycle, as specified by ICAO (2008a). The actual operational time-in-mode might vary from airport to airport depending on the traffic, environmental considerations, aircraft types and topographical conditions. The proportion of fuel used in a flight which is attributed to LTO decreases as the flight distance increases. Thus, a substantial part of the fuel consumption takes place outside the LTO cycle. Studies indicate that the majority of NO_x (60–80 %), SO₂ and CO₂ (80–90 %) is emitted at altitudes above 1 000 m: for CO it is about 50 %, and for VOC it is about 20–40 % (Olivier, 1991).

If **times-in-modes** are different from the assumptions made in this report, corrections may be made from basic data in the accompanying spreadsheets.

Please note that the total estimated fuel use for domestic aviation must be compared with sales statistics or direct reports from the airline companies. If the estimated fuel use deviates from the direct observations, the main parameters used for estimating the fuel must be adjusted in proportion to ensure that the mass of fuel estimated is the same as the mass of fuel sold.

Non-Instrument Flight Rules (non-IFR) flights

For some types of military or pleasure aircraft, the number of hours in flight is a better activity indicator for estimating the fuel used and the emissions produced than the number of LTOs. In some cases, data on the quantity of fuel used may be directly available.

Information on fuel used should be compiled by aircraft category. The fuel types, kerosene and aviation gasoline, should be reported separately. If data are not directly available, estimate the fuel used from the hours of operation and fuel consumption factors.

The appropriate emission factors and fuel use factors should be selected from Table 3.9 to Table 3.13.

To obtain an annual emissions estimate, the fuel consumption data in tonnes should be multiplied by the fuel-based emission factors.

3.5 Emission species profiles

Since very few experiments that have analysed the exhaust gas from aircraft turbines in detail have been reported, it is not possible to give a specific emission species profile. In terms of NO_x and VOCs, the profiles vary with the thrust setting of the aircraft and therefore depend on the activity. In terms of aircraft CCD, it is not possible to obtain accurate estimates for emission factors.

In terms of the LTO activity, the situation is similar. Attempts have been made to estimate the composition of the VOC profile. The USEPA (2009) reports a VOC profile for aircraft equipped with turbofan, turbojet and turboprop engines, based on Knighton et al. (2009). This composition is presented in Table 3.14.

Please note that the thrust setting during the landing and the take-off of the aircraft are different (see Table 2.2). Therefore, it is likely that the species profile will be different for these two situations.

Table 3.14 Speciated gas phase profile for aircraft equipped with turbofan, turbojet and turboprop engines

Compound	CAS		Compound	CAS	
	Registry No.a	Mass Fraction		Registry No.a	Mass Fraction
1,2,3-trimethylbenzene	526-73-8	0.00106	glyoxal	107-22-2	0.01816
1,2,4-trimethylbenzene	95-63-6	0.0035	isobutene/1-butene	106-98-9	0.01754
1,3,5-trimethylbenzene	108-67-8	0.00054	isopropylbenzene d	98-82-8	0.00003
1,3-butadiene d	106-99-0	0.01687	isovaleraldehyde	590-86-3	0.00032
1-decene	872-05-9	0.00185	methacrolein	78-85-3	0.00429
1-heptene	25339-56-4	0.00438	methanol d	67-56-1	0.01805
1-hexene	592-41-6	0.00736	methylglyoxal	78-98-8	0.01503
1-methylnaphthalene	90-12-0	0.00247	m-ethyltoluene	620-14-4	0.00154
1-nonene	124-11-8	0.00246	m-tolualdehyde	620-23-5	0.00278
1-octene	25377-83-7	0.00276	m-xylene and p-xylene d	108-38-3 / 106-42-3	0.00282
1-pentene	109-67-1	0.00776	naphthalene d	91-20-3	0.00541
2-methyl-1-butene	563-46-2	0.0014	n-decane	124-18-5	0.0032
2-methyl-1-pentene	763-29-1	0.00034	n-dodecane	112-40-3	0.00462
2-methyl-2-butene	513-35-9	0.00185	n-heptadecane	629-78-7	0.00009
2-methyl-naphthalene e	91-57-6	0.00206	n-heptane	142-82-5	0.00064
2-methylpentane	107-83-5	0.00408	n-hexadecane	544-76-3	0.00049
3-methyl-1-butene	563-45-1	0.00112	n-nonane	111-84-2	0.00062
4-methyl-1-pentene	691-37-2	0.00069	n-octane	111-65-9	0.00062
acetaldehyde d	75-07-0	0.04272	n-pentadecane	629-62-9	0.00173
acetone	67-64-1	0.00369	n-pentane	109-66-0	0.00198
acetylene	74-86-2	0.03939	n-propylbenzene	103-65-1	0.00053
acrolein d	107-02-8	0.02449	n-tetradecane	629-59-4	0.00416
benzaldehyde e	100-52-7	0.0047	n-tridecane	629-50-5	0.00535
benzene d	71-43-2	0.01681	n-undecane	1120-21-4	0.00444
butyraldehyde	123-72-8	0.00119	o-ethyltoluene	611-14-3	0.00065
c14-alkane	No CAS	0.00186	o-tolualdehyde	529-20-4	0.0023
c15-alkane	No CAS	0.00177	o-xylene d	95-47-6	0.00166
c16-alkane	No CAS	0.00146	p-ethyltoluene	622-96-8	0.00064
c18-alkane	No CAS	0.00002	p-tolualdehyde	104-87-0	0.00048
c4-benzene + c3-arald	No CAS	0.00656	phenol d	108-95-2	0.00726
c5-benzene + c4-arald	No CAS	0.00324	propane	74-98-6	0.00078
cis-2-butene	590-18-1	0.0021	propionaldehyde d	123-38-6	0.00727
cis-2-pentene	627-20-3	0.00276	propylene	115-07-1	0.04534
crotonaldehyde	4170-30-3	0.01033	styrene d	100-42-5	0.00309
dimethylnaphthalenes	28804-88-8	0.0009	toluene d	108-88-3	0.00642
ethane	74-84-0	0.00521	trans-2-hexene	4050-45-7	0.0003
ethylbenzene d	100-41-4	0.00174	trans-2-pentene	646-04-8	0.00359
ethylenef	74-85-1	0.15461	valeraldehyde	110-62-3	0.00245
formaldehyde d.f	50-00-0	0.1231	unidentified b	NA	0.29213
Sum of all compounds					1

Notes: Values in this table may be revised in the future as additional engine data become available.

- (a) CAS, Chemical Abstracts Service.
 - (b) See discussion of unidentified species in section 2.1 of this report.
 - (c) For commercial, military, general aviation and air taxi aircraft equipped with turbofan, turbojet and turboprop engines.
 - (d) Identified as a hazardous air pollutant in Section 112 of the U.S. Clean Air Act (shaded above).
 - (e) Identified in US EPA's Integrated Risk Information System (IRIS) as having toxic characteristics (shaded above).
 - (f) Values were adjusted from those shown in Knoughton et al. (2009) to account for rounding and to facilitate inclusion of the data in the US EPA's Speciate database (where the required sum of the values is 1.00000).
- Source: USEPA (2009).

4 Data quality

4.1 Completeness

Regardless of method, it is important to account for all fuel used for aviation in the country. The methods are based on total fuel use, and should completely cover CO₂ emissions. However, the allocation between LTO and CCD will not be complete for the Tier 2 method if the LTO statistics are not complete. In addition, the Tier 2 method focuses on passenger- and freight-carrying scheduled and charter flights, and thus not all aviation. Furthermore, the Tier 2 method does not automatically include non-scheduled flights and general aviation such as that involving agricultural aeroplanes, private jets or helicopters, which should be added if the quantity of fuel is significant. Completeness may also be an issue if military data are confidential; in this situation, it is good practice to aggregate military fuel use with another source category.

Other aviation-related activities that generate emissions include fuelling and fuel handling in general, maintenance of aircraft engines and fuel jettisoning to avoid accidents. In addition, in the wintertime, anti-ice and de-ice treatment of wings and aircraft is a source of emissions at airport complexes. Many of the materials used in these treatments flow off the wings when planes are idling, taxiing and taking off, and then evaporate. These emissions are, however, very minor and specific methods to estimate them are not included.

There are additional challenges with regard to distinguishing between domestic and international emissions. As each country's data sources are unique for this category, it is not possible to formulate a general rule regarding how to make an assignment in the absence of clear data. It is good practice to clearly specify the assumptions made so that the completeness can be evaluated.

In addition, the following sub-sections provide additional information on what is not included in the methods.

4.1.1 Emissions from start-up of engines

There is currently little information available for the estimation of emissions from the start-up of engines, and these are not included in the LTO cycle. This is not of great importance for total national emissions, but they may have an impact on air quality in the vicinity of airports.

4.1.2 Auxiliary power operations

Auxiliary power units (APUs) are used when no other power source is available for the aircraft, and may vary from airport to airport. This is the case, for example, if the aircraft is not parked in the vicinity of the terminal building. The APU fuel use and the related emissions should be allocated on

the basis of aircraft operations (number of landings and take-offs). However, no methodology for this has yet been developed. The use of APUs is severely restricted at some airports to maintain high levels of air quality, and therefore this source of fuel use and emissions may be declining. In total terms, the fuel consumption and emissions contribution from this source is regarded as very small (Winther et al., 2006).

4.1.3 Fuel dumping in emergencies

From time to time, aircraft will have to dump fuel before landing so that they do not exceed a certain maximum landing weight. This is done at a location and altitude at which there will be no local impact at ground level. Only large long-range aircraft will dump fuel. NMVOC emissions might become significant at very large airports with frequent long-distance flights. However, since the most probable altitude of these emissions will be above 1 000 m, these are currently not relevant for UNECE reporting. The airport authorities and airline companies might give information on the extent (frequency and amount) of dumping and the altitude at particular airports.

4.2 Double counting with other sectors

Emissions and fuel burnt from over-flights are excluded from these calculations to avoid double counting of emissions.

4.3 Verification

The methodology presented here could be used with international flight statistics (e.g. ATC providers) to provide a crosscheck against estimates made by individual national experts on the basis of national fuel and flight statistics.

National estimates may be checked against scientific or central inventories.

Estimated emissions and fuel use per available seat per kilometre travelled may also be compared between countries and aircraft types to ensure the credibility of the data that have been collected.

4.4 Uncertainty assessment

The uncertainties related to the estimated aircraft emissions are closely associated with the emission factors assigned to the estimations.

The emissions of CO₂ (and fuel use) are generally determined with a higher accuracy than the other pollutants.

4.4.1 Tier 1 approach

The accuracy of the distribution of fuel between domestic and international will depend on the national conditions.

The use of 'representative' emission factors may contribute significantly to the uncertainty. In terms of the factors relating to the LTO activities, the accuracy is better than for CCD (because of the origin of the factors from which the average values are derived). It would be hard to calculate a quantitative uncertainty estimate. The uncertainty may however lie between 20 and 30 % for LTO factors and 20 and 45 % for the CCD factors.

4.4.2 Tier 2 approach

The accuracy of the distribution of fuel between domestic and international will depend on the national conditions. The uncertainties lie mainly in the origin of the emission factors. There is a high uncertainty associated with the CCD emission factors.

4.4.3 Tier 3 approach

Uncertainties lie in the emission factors for the engines. ICAO (1995) estimated that the uncertainties of the different LTO factors are approximately 5–10 %. For CCD, the uncertainties are assumed to be 15–40 %.

4.5 Inventory quality assurance/quality control (QA/QC)

There are no specific issues relating to inventory quality assurance/quality control.

4.6 Gridding

Airports and emissions should be associated with the appropriate territorial unit (e.g. country). The airports can be divided into territorial units in the following way.

- The fuel and emissions from specific airports can be identified, and then summed to show the emissions from the region, which in turn can be summed for a country as a whole. Airports located in the various territorial areas should be identified.
- From the total national emissions estimate, emissions can be distributed to the territorial areas and airports using a key to reflect the aviation activity (e.g. the number of LTO cycles) between territorial areas and airports.

4.7 Reporting and documentation

There are no specific issues relating to reporting and documentation.

4.8 Areas for improvements in current methodology

The sub-sections below summarise causes for concern and areas in which further work may be required.

4.8.1 Landing and take-off (LTO)

A key priority is to update the fuel consumption and emission factors with data from the ICAO Aircraft Engine Emissions Databank maintained by EASA, in order to better reflect the emissions performance of the aircraft in use today.

Estimates of fuel used and emissions based on ICAO cycles (ICAO, 2008a) may not reflect accurately the situation of aircraft and airport operations in Europe.

The relationship between the minor pollutants and the regulated pollutants (HC, CO and NO_x) may need to be investigated in more detail.

4.8.2 Emissions above 3 000 ft (914.4 m)

A key priority is to update the fuel consumption and emission factors in order to better reflect the emissions performance of aircraft in use today. The proposed EUROCONTROL fuel burn and emissions calculation tool (AEM) uses EUROCONTROL's Base of Aircraft Data (BADA) for calculating

fuel burnt and emissions above 3 000 ft (EUROCONTROL, 2016a and 2016b). This database contains altitude- and attitude-dependent performance and fuel burn data for more than 200 types of aircraft.

It should be noted that the emission factors and fuel use for short distances (125 and 250 nm) are difficult to model and the suggested values are highly uncertain.

4.8.3 Particulate matter emissions, including PM_{2.5}

There are inconsistencies between PM emission fractions (i.e. total suspended particulate matter (TSP), PM₁₀ and PM_{2.5}) reported by CLRTAP Parties to the EMEP CEIP, evident by there being variable ratios of PM_{2.5} to TSP and PM_{2.5} to PM₁₀. The most common value reported is 1.00, that is, it is assumed that all PM emissions from aircraft can be viewed as PM₁₀. This is the relationship assumed in this guidebook.

5 Glossary and acronyms

AEDT	Aviation Environmental Design Tool of FDA
AEED	Aircraft Engine Emissions DataBank of ICAO
AEM	Advanced Emission Model
ANCAT	Abatement of Nuisance Caused by Air Transport, a technical committee of the European Civil Aviation Conferences (ECAC)
APU	auxiliary power unit
ATC	Air traffic control
ATM	Air traffic management
BADA	Base of Aircraft Data of EUROCONTROL
BFFM2	Boeing Fuel Flow Method 2
CAEP	Committee on Aviation Environmental Protection of ICAO
CCD	Climb/cruise/descent phases of flights, also referred to as 'Cruise' or 'En route'
EASA	European Aviation Safety Agency
EECCA	Eastern Europe, Caucasus and Central Asia
FAA	U.S. Federal Aviation Administration
FEIS	Fuel Burn and Emissions Inventory System of EUROCONTROL
FOA3	First Order Approximation version 3
FOCA	Swiss Federal Office of Civil Aviation
FOI	Swedish Defence Research Agency

ICAO	International Civil Aviation Organization
IFR	Instrument Flight Rules
LTO	Landing/take-off
MDG	Modelling and Databases Group of ICAO CAEP
OD	Origin and destination
SARP	Standards and Recommended Practice
STATFOR	Statistics and Forecasts of EUROCONTROL
VFR	Visual flight rules
UID	Engine Unique Identification Number

6 References

Agrawal, H., Sawant, A. A, Jansen, K., Miller, J. W. and Cocker III, D. R., 2008, 'Characterization of chemical and particulate emissions from aircraft engines', *Atmospheric Environment*, (42) 4380–4392 (<http://www.sciencedirect.com/science/article/pii/S1352231008000319>) accessed 18 September 2016.

ANCAT, 1998, ANCAT/EC2 global aircraft emission inventories for 1991/1992 and 2015, Report by the ECAC/ANCAT and EC working group, Gardner, R. (ed.).

Baughcum, S., Tritz, T.G., Henderson, S.C. and Pickett, D.C. 1996, Scheduled aircraft emission inventories for 1992: Database development and analysis, NASA contract report No 4700, NASA Langley Research Centre, Hampton, VA, (<http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19960038445.pdf>) accessed 18 September 2016.

Baughcum, S. L., Sutkus Jr., D. J. and Hendersonm, S. C., 1998, Year 2015 aircraft emission scenario for scheduled air traffic, NASA-CR-1998-207638. (<http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19980055200.pdf>) accessed 18 September 2016.

Döpelheuer, A., og M. Lecht (1998): Influence of engine performance on emission characteristics. RTO AVT Symposium on 'Gas Turbine Engine Combustion, Emissions and Alternative Fuels'. NATO Research and Technology Organization. RTO meeting proceedings.

EASA, EEA and EUROCONTROL, 2016, European aviation environmental report 2016 (<http://ec.europa.eu/transport/modes/air/aviation-strategy/documents/european-aviation-environmental-report-2016-72dpi.pdf> <https://www.eurocontrol.int/environment>) accessed 18 September 2016.

EEA, 2016, EMEP/EEA air pollutant emission inventory guidebook, European Environment Agency (<http://www.eea.europa.eu/themes/air/emep-eea-air-pollutant-emission-inventory-guidebook>).

EEA, 2016, European Union emission inventory report 1990–2013 under the UNECE Convention on Long-range Transboundary Air Pollution (LRTAP), European Environment Agency,

(<http://www.eea.europa.eu/publications/lrtap-emission-inventory-report>) accessed 15 September 2016.

EUROCONTROL, 2016a, 'Advanced Emission Model (AEM)' (<http://www.eurocontrol.int/services/advanced-emission-model-aem>), accessed 3 August 2016.

EUROCONTROL, 2016b, 'Base of Aircraft Data (BADA)' (<http://www.eurocontrol.int/services/bada>) accessed 3 August 2016.

EUROCONTROL, 2016c, 'Central Office for Delay Analysis (CODA)' (<http://www.eurocontrol.int/coda>) accessed 3 August 2016.

EUROCONTROL, 2016d, 'Statistics and forecasts (STATFOR)' (<http://www.eurocontrol.int/statfor>), accessed 3 August 2016.

FOCA, 2007, Aircraft piston engine emissions — Appendix 4: Nanoparticle measurements and research for cleaner AVGAS, Swiss Federal Office of Civil Aviation (https://www.bazl.admin.ch/dam/bazl/de/dokumente/Fachleute/Regulationen_und_Grundlagen/appendix_4_nanoparticlemeasurementsandresearchforcleaneravgas.pdf.download.pdf/appendix_4_nanoparticlemeasurementsandresearchforcleaneravgas.pdf), accessed June 2016.

FOI, 2016, 'FOI:s Confidential database for turboprop engine emissions' (<http://www.foi.se/en/Our-Knowledge/Aeronautics/FOIs-Confidential-database-for-Turboprop-Engine-Emissions/>), accessed April 2016.

ICAO, 1995, ICAO Engine Exhaust Emissions Databank, first edition, Doc 9646-AN/943, currently hosted and maintained as a website version (<https://www.easa.europa.eu/node/15672>), International Civil Aviation Organization.

ICAO, 2008a, 'Annex 16, Volume II: Environmental protection — Aircraft engine emissions', in: International standards and recommended practices, third edition.

ICAO, 2008b, FOA3.0 Guidance manual for use by MODTF, CAEP8-WG3-WP08 (FOA3.0 guidance manual), Working paper of the ICAO Committee on Aviation Environmental Protection Working Group 3 — Emissions Technical, 4th Meeting, 20–24 May 2008, Montreal, Canada..

ICAO, 2010, ICAO environmental report: Chapter 1: Aviation's contribution to climate change (http://www.icao.int/environmental-protection/Documents/EnvironmentReport-2010/ICAO_EnvReport10-Ch1_en.pdf) accessed 18 September 2016

ICAO, 2011, Airport Air Quality Manual', Doc 9889, International Civil Aviation Organization (<http://www.icao.int/environmental-protection/Documents/Publications/FINAL.Doc%209889.1st%20Edition.alltext.en.pdf>),.

ICAO, 2016a, 'DOC 8643 — Aircraft type designators' (<http://www.icao.int/publications/DOC8643/Pages/default.aspx>), last updated March 2016, International Civil Aviation Organization.

ICAO, 2016b, 'New ICAO aircraft CO2 standard one step closer to final adoption' (<http://www.icao.int/Newsroom/Pages/New-ICAO-Aircraft-CO2-Standard-One-Step-Closer-To-Final-Adoption.aspx>), International Civil Aviation Organization.

IPCC, 1997, Revised 1996 IPCC guidelines for national greenhouse gas inventories (<http://www.ipcc-nggip.iges.or.jp/public/gl/invs1.html>).

IPCC, 1999, IPCC special report: Aviation and the global atmosphere. Summary for policymakers, IPCC-XV/Doc. 9a (<https://www.ipcc.ch/pdf/special-reports/spm/av-en.pdf>), accessed 18 September 2016.

IPCC, 2000, IPCC Good Practice Guidance and Uncertainty Management in National Greenhouse Gas Inventories (<http://www.ipcc-nggip.iges.or.jp/public/gp/english/>) accessed 23 September 2016

IPCC, 2006, IPCC Guidelines for National Greenhouse Gas Inventories, Intergovernmental Panel on Climate Change (<http://www.ipcc-nggip.iges.or.jp/public/2006gl/>) accessed 18 September 2016.

Kinsey, J. S., Dong, Y., Williams, D. C. and Logan, R., 2010, 'Physical characterization of the fine particle emissions from commercial aircraft engines during the Aircraft Particle Emissions eXperiment (APEX) 1-3', *Atmospheric Environment*, (44) 2147–2156.

Knighton, W. B., Herndon, S.C., and Miake-Lye, R.C. (2009). Aircraft Engine Speciated Organic Gases: Speciation of Unburned Organic Gases in Aircraft Exhaust, US Environmental Protection Agency, (<https://www3.epa.gov/otaq/regs/nonroad/aviation/420r09902.pdf>), accessed 18 September 2016.

Kupiainen, K. and Klimont, Z., 2004, Primary emissions of submicron and carbonaceous particles in Europe and the potential for their control, Interim Report IR-04-079, IIASA, Austria, 115 pp.

MEET, 1997, Kalivoda, M. T. and Kudrna, M., Methodologies for estimating emissions from air traffic, MEET Deliverable No 18, the European Commission.

Petzold, A., Ström, J., Schröder, F.P. and Kärcher, B., 1999, Carbonaceous aerosol in jet engine exhaust: emission characteristics and implications for heterogeneous chemical reactions, *Atmospheric Environment* (<http://www.sciencedirect.com/science/article/pii/S1352231098003148>) accessed 18 September 2016.

Petzold, A., Stein, C., Nyeki, S., Gysel, M., Weingartner, E., Baltensperger, U., Giebl, H., Hitzenberger, R., Döppelheuer, A., Vrchoťický, S., Puxbaum, H., Johnson, M., Hurley, C. D., Marsh, R. and Wilson, C. W., 2003, 'Properties of jet engine combustion particles during the PartEmis experiment: Microphysics and Chemistry', *Geophysical Research Letters*, (30) 1719.

Petzold, A., Marsh, R., Johnson, M., Miller, M., Sevcenco, Y., Delhayé, D., Vancassel, X., Ibrahim, A., Veira, A., Williams, P., Bauer, H., Crayford, A., Morris, S., Kay, P., Bowen, P., Bachalo, W. D. and Raper, D., 2009, Study on sampling and measurement of aircraft particulate emissions SAMPLE — Final Report, Research project EASA.2008/OP13, EASA, Cologne, Germany, 46 pp.

Olivier, J. G. J., 1991, Inventory of aircraft emissions: A review of recent literature, Report No 736 301 008, National Institute of Public Health and Environmental Protection, Bilthoven, the Netherlands.

Rogers, F., Arnott, P., Zielinska, B., Sagebiel, J., Kelly, K. E., Wagner, D. Lighty, J. S. and Sarofim, A. F., 2005, 'Real-time measurements of jet aircraft engine exhaust', *Journal of Air and Waste Management Association*, (55) 583–593.

Shah, S.D., Cocker, D.R. Miller, J.W. and Norbeck, J.M., 2004a, Emission rates of particulate matter and elemental and organic carbon from in-use diesel engines, *Environmental Science and Technology*, 38 (9) (2004), pp. 2544–2550.

Shah, S.D., Temitope, A., Ogunyoku, J., Miller, W. and Cocker D.R, 2004b, On-road emission rates of PAH and n-Alkane compounds from heavy-duty diesel vehicles, *Environmental Science and Technology*, 39 (14) (2004), pp. 5276–5284.

Sutkus Jr., D. J., Baughcum, S. L., and DuBois, D. P., 2001, Scheduled civil aircraft emission inventories for 1999: database development and analysis, NASA-CR-2001-211216 (<https://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20020012699.pdf>), accessed 18 September 2016.

USEPA, 2009, Recommended best practice for quantifying speciated organic gas emissions from aircraft equipped with turbofan, turbojet, and turboprop engines, Version 1.0, Assessment and Standards Division, Office of Transportation and Air Quality, US Environmental Protection Agency, and AEE-300 — Emissions Division Office of Environment and Energy, Federal Aviation Administration (<http://www.epa.gov/otaq/regs/nonroad/aviation/420r09901.pdf>).

Winther, M., Kousgaard, U. and Oxbøl, A., 2006, 'Calculation of odour emissions from aircraft engines at Copenhagen Airport', *Science of the Total Environment*, (366) 218–232.

Winther, M. and Nielsen, O.,-K., 2011, 'Technology dependent BC and OC emissions for Denmark, Greenland and the Faroe Islands calculated for the time period 1990–2030', *Atmospheric Environment*, (45) 5880–5895.

Winther, M., Kousgaard, U., Ellermann, T., Ketzel, M., Løfstrøm, P., Massling, A. and Nøjgaard, J. K., 2012, Emissions from aircraft and handling equipment in Copenhagen Airport, Paper presented at 19th International Transport and Air Pollution Conference 2012, Thessaloniki, Greece.

Wuebbles, D., Gupta, M. and Ko, M., 2007, 'Evaluating the impacts of aviation on climate change', *EOS Transactions of the American Geophysical Union*, (88) 157–168.

7 Point of enquiry

Enquiries concerning this chapter should be directed to the relevant leader(s) of the Task Force on Emission Inventories and Projection's (TFEIP's) expert panel on Transport. Please refer to the TFEIP website (www.tfeip-secretariat.org/) for the contact details of the current expert panel leaders.


Annex 1 Projections

Future aircraft emissions will be determined by the volume of air traffic, air traffic management (ATM) improvements, new aircraft technologies and the rate at which the aircraft fleet changes.

Following the publication of the European Aviation Environmental Report 2016, published by EASA, the European Environment Agency (EEA) and EUROCONTROL, a series of projections are included in this annex. These projections focus on air traffic growth, noise and emissions increases, and the overall change in the environmental aspects of aviation due to future technological developments, social changes and climate change. This annex is mainly based on the *European aviation environmental report 2016* (EASA et al., 2016).

The environmental impacts of European aviation have increased as a result of the growth in air traffic. Between 1990 and 2005, both air traffic and emissions of CO₂ have increased by about 80 %. However, because of technological improvements, fleet renewal, increased ATM efficiency and the 2008 economic downturn, in 2014 both emissions and noise exposure were at approximately 2005 levels. Future improvements are not expected to be sufficient to prevent an overall growth in emissions over the next 20 years, but noise exposure may stabilise by 2035. Figure A1.1 depicts the forecasted European air traffic from 2005 to 2035, with different scenarios beyond 2014 depending on a traffic growth higher or lower than expected. According to the base traffic forecast, after remaining stable between 2005 and 2014, air traffic is expected to increase by a further 45 % between 2014 and 2035.


Figure A1.1 European air traffic forecast

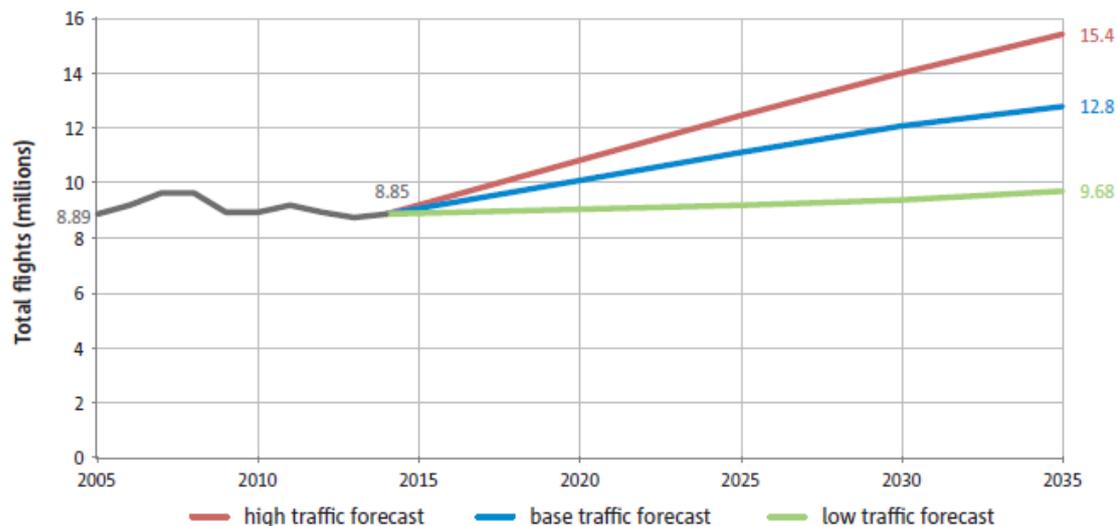

Source: EASA et al., 2016

As seen in Figure A1.2, CO₂ emissions have followed the same trend as air traffic: from 1990 to 2014, CO₂ emissions increased by 80 %, remaining stable between 2005 and 2014; they are, however, also expected to increase by a further 45 % between 2014 and 2035. NO_x emissions doubled between 1990 and 2014, but technological developments are expected to increase at a lower rate than in previous years, and a further 43 % increase is expected between 2014 and 2035, considering the air traffic growth forecast.

Figure A1.2 Forecast of traffic growth and CO₂ and NO_x emission increases depending on traffic growth (

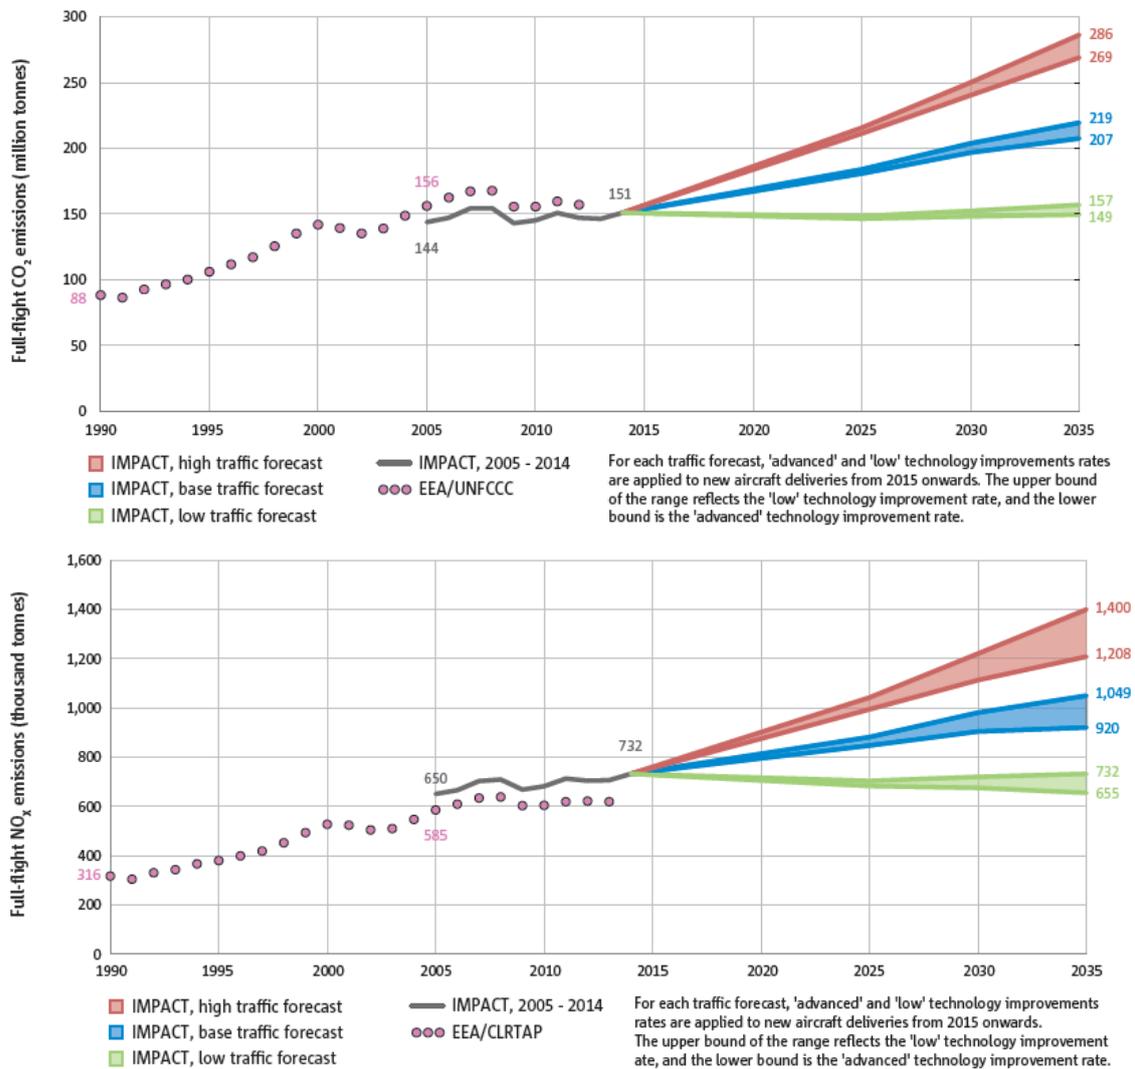

Source: EASA et al., 2016

In 2015, 92 European airports participated in the Airport Carbon Accreditation programme, and 20 of these airports were carbon neutral. Around 80 % of passengers in Europe were handled via an airport with a certified environmental or quality management system. However, by 2035, in the absence of continuing efforts, it is anticipated that some 20 major European airports will face significant congestion and related environmental impacts because of air traffic growth.

Aircraft and their engines must meet international standards for noise and pollutant emissions. Pollutant emissions from engines have been significantly reduced by technological developments. This has been promoted by more stringent NO_x limits which have been introduced to avoid potential trade-offs due to the demand for more fuel-efficient engines. The average NO_x margin to the ICAO CAEP/6 limit for in-production engine types has increased by about 15 % over the last five years. Additional standards for CO₂ and PM are currently being developed and are expected to enter into force in the near future.

Table A1.1 summarises the different aviation emission species and their change between 2005 and 2014. It also includes the change forecasted up to 2035.

Table A1.1 Summary of emission indicators based on IMPACT data

Parameter	2005	2014 (change since 2005)	Base forecast for 2035, range for advanced to low technology (change since 2005)
Average fuel burn (kg) per passenger km	0.0388	0.0314 (-19 %)	0.0209–0.0222 (-46 % to -43 %)
CO ₂ (Mt)	144	151 (+5 %)	207–219 (+44 % to +53 %)
NO _x (1 000 t)	650	732 (+13 %)	920–1049 (+42 % to +61 %)
NO _x below 3 000 ft (1 000 t)	53.3	58.8 (+10 %)	73.3–83.1 (+37 % to +56 %)
HC (1 000 t)	20.8	17.0 (-18 %)	22.9 (+10 %)
HC below 3 000 ft (1 000 t)	7.8	6.4 (-18 %)	11.0 (+40 %)
CO (1 000 t)	143	133 (-7 %)	206 (+44 %)
CO below 3 000 ft (1 000 t)	52.4	48.2 (-8 %)	85.5 (+63 %)
Volatile PM (1 000 t)	4.18	4.47 (+7 %)	6.93 (+66 %)
Volatile PM below 3 000 ft (1 000 t)	0.27	0.27 (-1 %)	0.41 (+50 %)
Non-volatile PM (1 000 t)	2.67	2.38 (-11 %)	3.16 (+18 %)
Non-volatile PM below 3 000 ft (1 000 t)	0.15	0.13 (-14 %)	0.17 (+11 %)

Source: EASA et al., 2016.

Slower growth results in a more slowly ageing fleet. Newer aircraft and engines are more environmentally efficient, so the age of the European aircraft fleet is an important indicator. The mean aircraft age (weighted by the number of flights made by each aircraft) has crept up from 9.6 to 10.3 years, with only 2009 and 2010 seeing reductions (Figure A1.2). These reductions were driven by the rapid expansion of the low-cost fleet, which is younger than average, and retirements of less fuel efficient older aircraft by the traditional scheduled operators in response to higher fuel prices and falling demand (retirements jumped to over 6 % of the fleet per year in 2008 and 2009). In more recent years, the fleet began to age again as a result of slower low-cost carrier growth, and very limited fleet renewal by the traditional scheduled carriers. In 2014, about half of all flights were by aircraft built in 2005 or later. This figure increases to three-quarters if only low-cost carriers are considered. The mean age of the non-scheduled charter fleet has increased most rapidly, reflecting the decline of this segment and the switch to scheduled operations. The rapid expansion of business

aviation up to 2008 was accompanied by the introduction of new aircraft, but business aviation declined sharply with the economic downturn, with the focus subsequently shifting to increased utilisation rather than buying new aircraft. The mean age of aircraft used for all-cargo operations (i.e. not including the passenger flights which often carry cargo too) is around 19 years during the whole of this period because of the generally lower daily aircraft utilisation.

Figure A1.3 Mean aircraft age has crept up to above 10 years (Source: EASA et al., 2016)

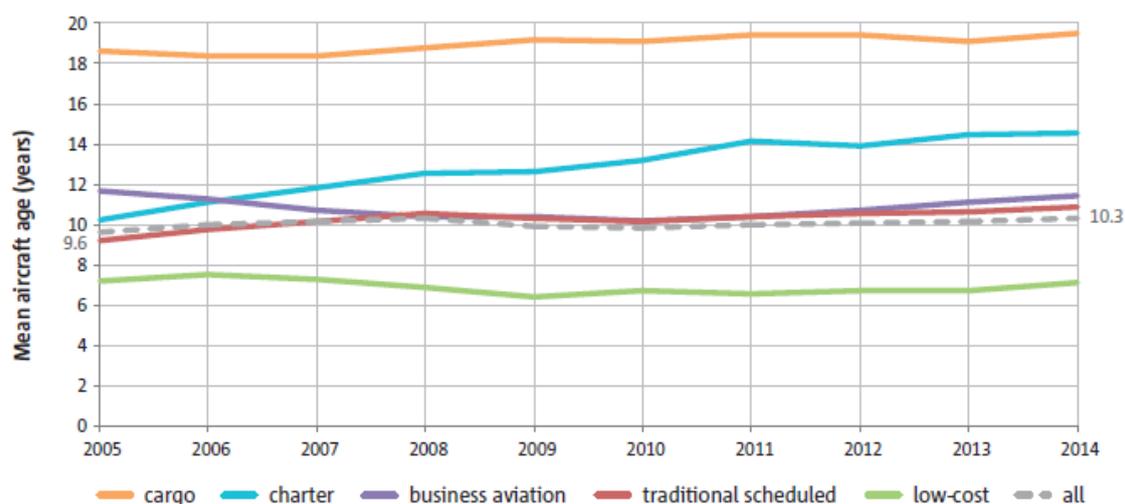


Table A1.2 below reflects the projection of fleet age distribution for 2010 and 2020.

Table A1.2 World fleet age profile in 2010 and 2020

Age (years)	% in 2010	% in 2020
0-5	27.6	32.5
6-10	20.5	22.9
11-15	19.7	17.8
16-20	23.5	16.2
21-25	8.6	10.6

Note: The growth of the fleet between 2010 and 2020 is expected to be 26 %.

The commercial uptake of sustainable alternative fuels in the aviation sector is very slow, but it is assumed that it will play an important role in reducing aviation greenhouse gas emissions in the coming decades. The European Advanced Biofuels Flightpath provides a roadmap for achieving an annual production rate of 2 million tonnes of sustainably produced biofuel for civil aviation by 2020. European commercial flights have trialled sustainable alternative fuels. However, regular production of sustainable aviation alternative fuels is projected to be very limited in the next few years, and thus it is unlikely that the roadmap's 2020 target will be achieved.

The reader is advised to refer to EASA et al., (2016) and associated website from which the final report can be downloaded. The underlying data in the figures can also be downloaded as Excel spreadsheets.

Annex 2 Additional comments on emission factors

ICAO (1995) (exhaust emissions databank) provides basic aircraft engine emissions data for certificated turbojet and turbofan engines covering the rate of fuel used and the emission factors for HC, CO and NO_x at the different thrust settings used. Other relevant emissions data are derived from other sources. The exhaust emissions databank is now accessible via the internet (ICAO, 1995). In addition to HC, CO and NO_x, this version also contains emission factors for smoke at the different thrust settings (columns BL to BO of the databank). PM emission factors can be derived from those for smoke, and the methodology used for this conversion (the so-called First Order Approximation version 3 (FOA3)) is published in ICAO, 2007.

The heavy metal emissions are, in principle, determined from the metal content of kerosene or gasoline. Thus, general emission factors for the stationary combustion of kerosene and the combustion of gasoline in cars may be applied. The only exception is lead. Lead is added to aviation gasoline to increase the octane number. The lead content is higher than in leaded car gasoline, and the maximum permitted levels in the UK are shown below. A value of 0.6 g of lead per litre of gasoline should be used as the default value if there is an absence of more accurate information. Actual data may be obtained from oil companies.

Table A2.1 Lead content of aviation gasoline in the UK

AVGAS designation	Maximum lead content (as tetra ethyl lead)
AVGAS 80	0.14 g/l
AVGAS low lead 100	0.56 g/l
AVGAS 100	0.85 g/l

There is little information on PM from aircraft. In Petzold et al. (1999) and Döpelheuer et al. (1998), data are published for various aircraft types. Petzold (1999) also describes the particle size. For newer aircraft, the size distribution is dominated by particles with a diameter between 0.025 and 0.15 µm. For newer aircraft (certified after 1976), such as A300, B737 and DC10, the emission factor is about 0.01 g/kg fuel. Döpelheuer and Lecht (1998) also provide data for different phases of the flight for A300. The factor is higher at take-off (0.05 g/kg) and lower at cruise (0.0067 g/kg), while the factor for climb and descent is about 0.01 g/kg. From combustion science principles, it is anticipated that the PM_{2.5} to PM₁₀ ratio for aircraft engines will be similar to, or higher than, that for internal combustion engines. Given that the ratio for internal combustion engines is estimated to be 94 %, it is reasonable to assume that for aircraft their PM emissions can be considered as PM_{2.5}. The PM_{2.5} to PM₁₀ ratio most commonly used when reporting values within EMEP is 1.0. This is the relationship assumed in this Guidebook.

Little information is currently available about possible exhaust emissions of persistent organic pollutants (POPs) from aircraft engines. Emissions of H₂O may be derived from the fuel consumption at the rate of 1.237 kg H₂O/kg fuel. Using the emission factors, special emphasis should be put on the assumptions of the weight per cent of sulphur (assumed to be 0.05 %). If the percentage of sulphur in the fuel used is different, this should be taken into account. If the sulphur per cent used is, for example, 0.01 % instead of 0.05 %, the emission factor should be divided by five to show the true factor.

Annex 3 Black carbon (BC) fractions of particulate matter emissions from aviation

In order to maintain consistency throughout the guidebook, it should be noted that the literature emission factor values used here directly represent elemental carbon (EC), and that these values are assumed to be equal to BC.

Table A3.1 presents an overview of the five studies that have been regarded as relevant sources for BC fractions of PM emissions (f-BC) from aviation. Apart from f-BC, for each study the engine type and emission test modes are listed, as well as the PM emission sampling conditions, as far as information is available. Some of the following references also report figures for organic carbon (OC) which can be input for the further assessment of OC fractions of PM (f-OC).

Petzold et al. (2009) carried out test rig measurements of the emissions from four engine operational conditions in the Sample (study on sampling and measurement of aircraft particulate emissions) Project. The measurements of PM were adjusted to include the particulate emissions in the form of water-bound sulphate. BC and EC values were also measured. Petzold et al. (2009) found that BC equals EC. No trend in emissions could be observed for variations in engine test modes.

Petzold et al. (2003) simulated, in a test rig for cruise power settings, the emissions influence from fuel with low, medium and high sulphur content used by old and new engine technologies. BC and TC (total carbon) emissions are measured. Subsequently, the TC emissions are adjusted by 30 % in an upwards direction (compared with Petzold et al. (2009)) in order to calculate the total mass of PM and determine the f-BC fraction. No trend in emissions could be observed for variations in engine test modes.

Rogers et al. (2005) carried out ground-based plume measurements of the emissions from a jet engine military fighter and a turboshaft engine being used by military helicopters. Rogers et al. (2005) measured EC, OC and total PM mass emissions, and referred to the measured EC factor as the 'black factor'. Based on one test run, they derived BC factors which could be related to the PM mass emission factors.

Kinsey et al. (2010) reported ground-based plume emissions measurements for nine commercial aircraft engines in three field campaigns of the Aircraft Particles Emissions eXperiment (APEX) 1–3 study. In the supplementary material provided by Kinsey et al. (2010), EC emissions were interpreted as BC and, furthermore, it was noted that volatile PM emissions consist of sulphur and organic PM. In Kinsey et al. (2010), for five aircraft engines, the total PM mass emissions were split into volatile (PM_{vol}) and non-volatile (PM_{non-vol}) fractions. For the present note, the non-volatile share of total PM is assumed to be equivalent to the f-BC fraction.

Agrawal et al. (2008) measured the emissions of, for example, PM, EC and OC from four commercial aircraft. No trends in emissions could be observed for variations in engine test modes. For the present discussion, EC values were used for BC, in accordance with the assumptions made by, for example, Rogers et al. (2005) and Kinsey et al. (2010).

Winther et al. (2012) calculated the emissions of PM for aircraft engines in Copenhagen Airport, based on actual flight operational data and aircraft–engine combinations. The FOA3 method (ICAO,

2008b) was used to estimate the PM emissions, split into volatile PM coming from the sulphur in the fuel and exhaust VOC, and non-volatile PM from soot. Subsequently, a fuel-weighted f-BC fraction (non-volatile share of total PM) was derived taking into account the landing, take off and taxi engine power modes. The f-BC fraction for Copenhagen Airport was similar to the f-BC fraction calculated for LTO for Schiphol Airport in Amsterdam also using the FOA3 method (Andreas Petzold, DLR, 2012, personal communication).

The f-BC and f-OC (if available) fractions derived from the abovementioned studies are listed in Table A3.1.

Table A3.1 BC and OC fractions (%) of PM emissions from relevant studies

Study	Aircraft/Engine types	Test conditions	f-BC	f-OC (%) ^(a)
Petzold et al. (2003)	Old engine	Cruise, low sulphur	61	
		Cruise, medium sulphur	44	
		Cruise, high sulphur	50	
	New engine	Cruise, low sulphur	75	
		Cruise, medium sulphur	31	
		Cruise, high sulphur	40	
Agrawal et al. (2008)	CFM56-7B22	Mode 1 (4 and 7 %)	31	91.2
		Mode 2 (30 and 40 %)	8	14
		Mode 3 (65 %)	59	16
		Mode 4 (85 %)	59	24
	CFM56-3B1	Mode 1 (4 and 7 %)	48	67
		Mode 2 (30 and 40 %)	60	60
		Mode 3 (65 %)	26	44
		Mode 4 (85 %)	85	12
	CFM56-3B2	Mode 1 (4 and 7 %)	55	79
		Mode 2 (30 and 40 %)	69	33
		Mode 3 (65 %)	74	19
		Mode 4 (85 %)	79	19
	CFM56-7B22	Mode 1 (4 and 7 %)	47	189
		Mode 2 (30 and 40 %)	72	127
		Mode 3 (65 %)	86	15
		Mode 4 (85 %)	68	35
Rogers et al. (2005)	Military F404-GE-400, T700-GE-401	65 %-80 %, 67 %-98 %	56	19
Kinsey et al. (2010)	CFM56-2C1	Various power modes	38	62
	CFM56-3B1	Various power modes	21	79
	AE3007A1E	Various power modes	38	62
	P&W4158	Various power modes	46	54
	RB211-535E4B	Various power modes	59	41
Petzold et al. (2009)	Test rig	Condition1	66	
		Condition2	33	
		Condition3	54	
		Condition4	36	
Winther et al. (2012)	Copenhagen Airport fleet/engine	Landing	33	

	Take off	54
	Taxi	30
Petzold et al. (2003)	Average	50
Agrawal et al. (2008)	Average	58
Rogers et al. (2005)	Average	56
Kinsey et al. (2010)	Average	40
Petzold et al. (2009)	Average	47
Winther et al. (2012)	Average	39
Average (all)	Average	48

(^a) If f-OC values are > 100, the literature indicates that this could be because the sampling methods produce a positive artefact. In this case, the OC positive artefact was assumed to offset the hydrogen and oxygen content of the organic mass, based on previous research (Shah et al., 2004a and 2004b; Agrawal et al., 2008).

Conclusion

The data available are regarded as being too scarce to propose different f-BC fractions for different tiers and explicitly for LTO and CCD in the guidebook's chapter on aviation. Hence, the same average f-BC fraction (f-BC = 0.48) will be proposed for the simple LTO and CCD methodology in Tier 1, the aircraft type-specific Tier 2 methodology, the Tier 3 methodology based on aircraft type city-pairs and for military aircraft. For piston-engined aircraft, data from Winther and Nielsen (2011) will be used (f-BC = 0.15) based on information from Kupiainen and Klimont (2004).

Table A3.2 lists the tables in the guidebook chapter on aviation which contain f-BC fraction information. These fractions must then be combined with the existing PM factors in GB in order to establish the final BC emission factor in each case.

Table A3.2 Tables in this chapter of the guidebook which contain f-BC fraction data

Table No	Tier	Detail	f-BC source
3.3	1	Old/average fleet; LTO and CCD emission factor.	Present note; f-BC = 0.48
3.5	2	LTO emf. per aircraft type	Present note; f-BC = 0.48
3.4	1	Piston-engined aircraft	Winther et al. (2011); f-BC = 0.48
3.15	2	Military	Present note; f-BC = 0.48

Acknowledgements

Andreas Petzold, DLR, is thanked for technical discussions.

Annex 4 EUROCONTROL fuel burn and emissions inventory system

EUROCONTROL has developed a Fuel Burn and Emissions Inventory System (FEIS) that produces estimates of the total masses of jet fuel (for aircraft powered by turbojet, turbofan or turboprop engines) and aviation gasoline (for aircraft powered by piston engines) burnt by all the aircraft that, during the year before, made relevant flights that departed from, or arrived at, or both, an airport (or aerodrome) that is located in a relevant part of the territory of one of the 28 EU Member States. The total masses of certain gaseous species and types of PM that were emitted because of the burning of this jet fuel and aviation gasoline are also estimated. This work is done in support of the EEA member countries, including those Member states of the EU.

The purpose of this annex is to provide a high-level description of both the procedure by which these estimates are produced and the tools that are used to do the calculations.

The system developed by EUROCONTROL concerns only the aircraft movement information that is available within the EUROCONTROL zone of coverage; it also concerns only IFR flights (no VFR flights), and all flights operated as military or special operations are excluded. For aircraft movements for which the trajectory is partly or completely outside of the EUROCONTROL zone of coverage, trajectories are completed or generated for aircraft movements identified in commercial aircraft schedule databases.

Currently, FEIS relies mainly on the capability of the EUROCONTROL AEM to process a large amount of data in a reasonable time.

In the context of FEIS, the AEM is used as outlined below.

- The AEM processes flight movements to estimate the amount of fuel burnt, and then estimates the emissions that result from the combustion of this fuel in the engines. A flight movement is the movement on the ground and in the air of an aircraft (an airframe plus its engine(s)) following a 4D path (or profile).
- Above 3 000 ft, this profile is described in terms of a sequence of straight-line segments that are retrieved from the updated flight plan data managed by the EUROCONTROL Network Manager Operations Centre or partly or completely generated for flight movements outside of the EUROCONTROL zone of coverage. The fuel burn is calculated for each segment of a flight profile thanks to the aircraft performance information provided by EUROCONTROL's BADA (EUROCONTROL, 2016b). This database provides altitude- and attitude-dependent performance and fuel burn data for more than 200 aircraft types. Once the amount of fuel burnt is calculated for each segment, the Boeing Fuel Flow Method 2 (BFFM2) is used to correct the amount of fuel that is burnt before multiplying by the EFs.
- Below 3 000 ft, because information about flight profiles is not sufficiently accurate, the AEM calculates the amount of fuel burnt according to the ICAO LTO cycle methodology, which was defined by the ICAO Engine Certification specifications, and models flight movements (below 3 000 ft) as a series of defined thrust levels for defined lengths of time associated with each LTO cycle flight phase. The fuel burn is calculated thanks to the ICAO Aircraft Engine Emissions DataBank (AEED), which provides EIs and fuel flow for a very large number of aircraft engines. As EUROCONTROL has developed a table that lists a large range of

aircraft models and the engines with which they are generally equipped, the AEM can link each flight movement processed by the AEM to a specific engine as identified by its Unique Identification Number (UID), as listed in the ICAO Engine Exhaust Emissions Databank. A 'standard' LTO cycle lasts for a total of 32 minutes and 54 seconds, of which the engines are in idle mode for 26 minutes while taxiing out before taking off and taxiing in after landing (19 minutes and 7 minutes, respectively). But for many airports in Europe, the time spent with the engine thrust set to idle is different from the 26 minutes of the ICAO LTO cycle. Therefore, to improve the accuracy of the system, EUROCONTROL replaces default ICAO taxi-in and taxi-out times with actual average annual airport taxi-in and taxi-out times, as calculated by EUROCONTROL's CODA (EUROCONTROL, 2016c). Once the amount of fuel burnt in a phase of the LTO cycle is known, the associated emissions can be calculated.

Table A4.2 AEM fuel burnt and corresponding emissions calculation method

Height (feet)	Fuel burnt	NO _x , UHCs and CO	CO ₂ , H ₂ O and SO _x	VOCs
> 3 000 CCD	BADA	BFFM2	Proportional to the mass of fuel burnt	Proportional to the mass of UHCs generated
≤ 3 000	AEED and other databases			

As such, the FEIS developed by EUROCONTROL implements a methodology that lies somewhere between a Tier 3A and a Tier 3B methodology.

From the fuel burn and emissions calculated from each flight movement in the system, EUROCONTROL generates reports to assist reported by Parties to the two following conventions:

- the UNFCCC;
- the LRTAP Convention of the United Nations Economic Commission for Europe.

FEIS is updated on an annual basis with the previous year's flight movement data and fuel and emissions estimations; the historical year data, starting from 2005, are maintained and, in the case of significant methodology changes that would result in a change of more than 5 % from the previous year's estimated emissions, recalculated.

A more detailed description of the EUROCONTROL FEIS is available upon request from the EEA.

Annex 5 Emission calculator accompanying files

The accompanying emission calculator files are available as an electronic annex alongside the main Guidebook files at <http://www.eea.europa.eu/publications/emep-eea-guidebook-2016>.

Users will find two files:

- Master emission calculator;
- LTO emission calculator.